

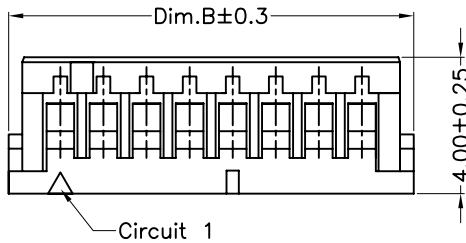


HDF125T

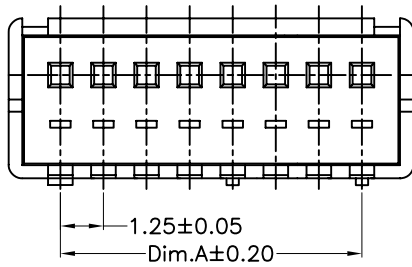

HDF125-XX



Specification:

Current Rating: 1.0A AC,DC  
 Voltage rating: 125V AC,DC  
 Contact Resistance: 20m Max  
 Insulation Resistance: 100M Min  
 Withstanding Voltage:250V AC/Minute  
 Temperature Range: -40°C to +85°C  
 Applicable Wire: AWG 28# TO 32#  
 Material:  
 Insulator: High Temp Plastic (Nylon 66 UL94V-0)  
 Insulator Color:White  
 Contacts:Phosphor Bronze  
 Plating: Tin Plated  
 How To Order  
 HDF125-XX

No.Of Position

Dimension:

Pos	DIM:(mm)		Pos	DIM:(mm)	
	A	B		A	B
2	1.25	4.15	9	10.00	12.90
3	2.50	5.40	10	11.25	14.15
4	3.75	6.65	11	12.50	15.40
5	5.00	7.90	12	13.75	16.65
6	6.25	9.15	13	15.00	17.90
7	7.50	10.40	14	16.25	19.15
8	8.75	11.65	15	17.50	20.40

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 1.25mm Socket Housing & Terminal(DF13 Series)	SIZE <b>A4</b>
E								
D				APPROVAL: Chao Peng	SCALE: 1:1	PART NO: HDF125-XX & HDF125T		
C					APPROVAL: Chao Peng			SHEET: 1 / 1
B					PROJECTION:			
A	01-SEP-2021	(H0031)	Ken					
REV	DATE	FILE	BY					