





Section B-B



HDS125T



Section A-A






Specification:

Current Rating: 1.0A AC,DC
 Voltage rating: 125V AC,DC
 Contact Resistance: 20m Max
 Insulation Resistance: 100M Min
 Withstanding Voltage:250V AC/Minute
 Temperature Range: -40°C to +85°C
 Applicable Wire: AWG 28# TO 32#
 Material:

Insulator: High Temp Plastic (Nylon 66 UL94V-0)
 Insulator Color:White
 Contacts:Phosphor Bronze
 Plating: Tin Plated

How To Order
 HDS125-XX

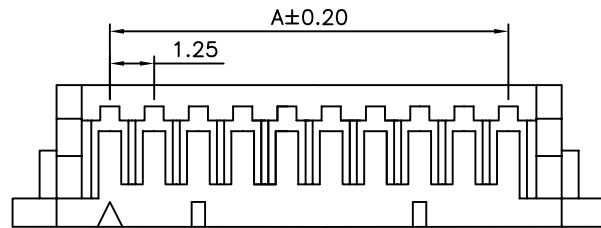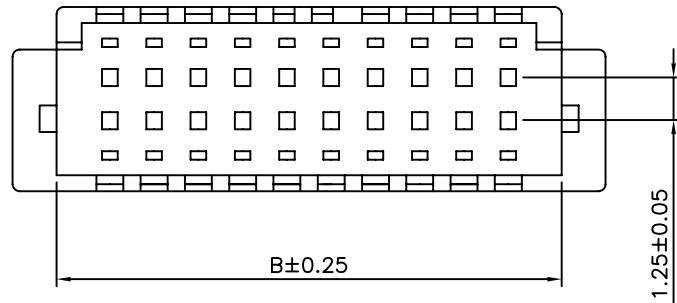

Poles	Part No	DIM:(mm)	
		A	B
10	HDS125-10	5.00	8.01
20	HDS125-20	11.25	14.26
30	HDS125-30	17.50	20.51
40	HDS125-40	23.75	26.76

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 1.25mm Socket Housing & Terminal	SIZE A4
E								
D				CHECKED: Lily Chou	UNIT: MM	PART NO: HDS125-XX & HDS125T		
C					SCALE: 1:1			
B				APPROVAL: Chao Peng	SHEET: 1 / 1			
A	01-SEP-2015	(H0031)	Ken		PROJECTION:			
REV	DATE	FILE	BY					