





1

2

3

4



5

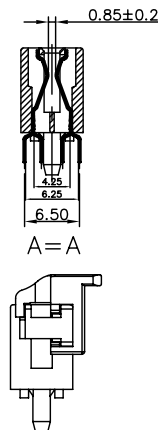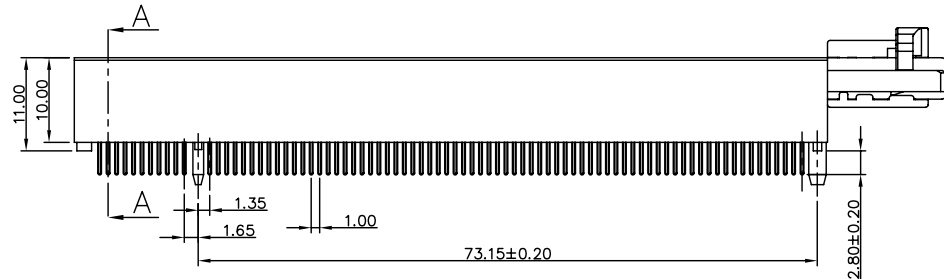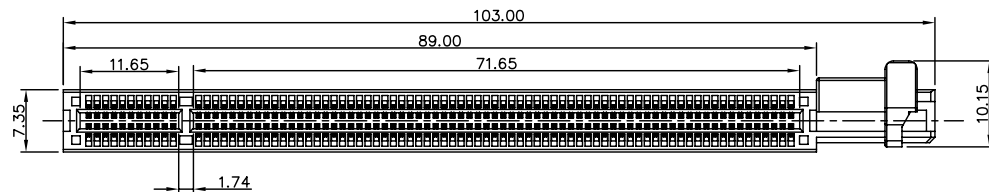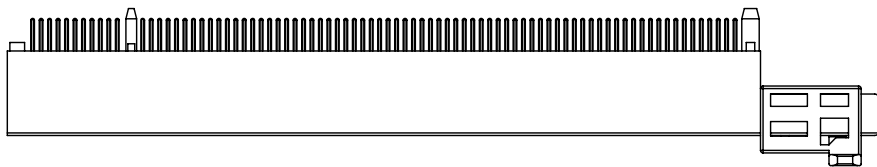

Electric Specifications
 Current Rating:3.0Amps
 Rating Voltage: 250V AC
 Insulation Resistance:100M Ohm Min At DC 500V
 Contact Resistance:30m Ohm Max At DC 100m Amps
 Withstanding Voltage:1 Minute At 750V r.m.s Min
 Temperature Range:-40°C~85°C

Materials:
 Insulator:High Temp. Plastic (Nylon 46 UL94V-0)
 Insulator Color:Balck
 Terminal :Copper Alloy
 Plating:Tin Plated

How To Order
 PCIEV10-164-RK

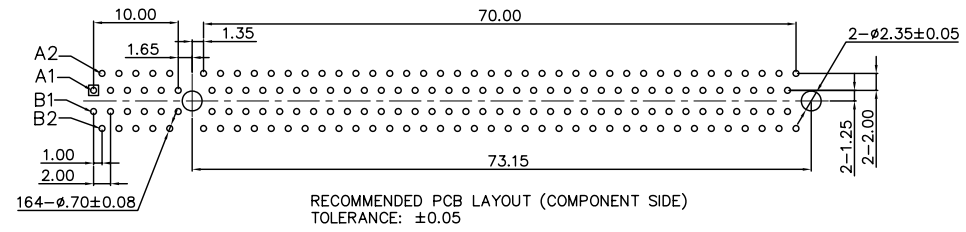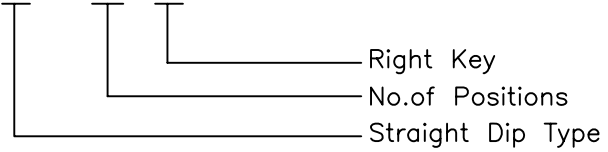

RoHS Compliant

				DRAWN: WGL	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15			
E				CHECKED: Jeremy Liu	UNIT: MM SCALE:2:1		DESCRIPTION: PCI-E 164 Connector Straight Dlp Type Right Key	SIZE
D				APPROVAL: Mike Wu	SHEET: 1 / 1	PART NO: PCIEV10-164-RK	A4	
C					PROJECTION:			
B								
A	14-Jul-2017	(PC0001)	WGL					
REV	DATE	FILE	BY					