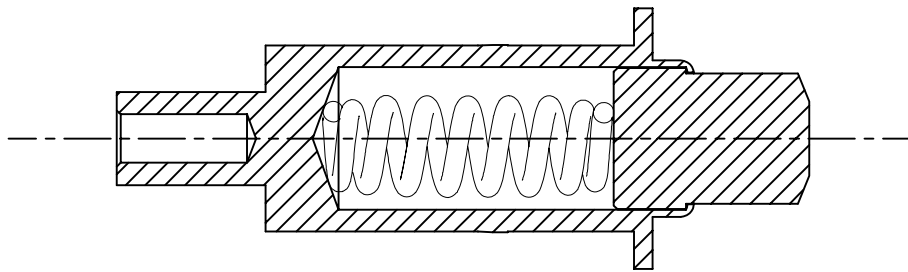




Note:

- 1: Material(材料):
 Barrel: Brass C3604 (钎管, 黄铜 C3604)
 Plunger: Brass C3604 (钎头, 黄铜 C3604)
 Spring: SUS304 (弹簧, 不锈钢 SUS304)
- 2: Plating(电镀):
 Barrel: 1u' Au over 50~80u' Ni(钎管, 镀金1u' 镍底50~80u',)
 Plunger: 1u' Au over 50~80u' Ni(钎头, 镀金1u' 镍底50~80u',)
 Spring: 1u' Au over 50~80u' Ni(弹簧, 镀金1u' 镍底50~80u',)
- 3: Electrical(电气特性):
 Rated Current & Voltage: DC 12V;1A (额定电压&电流: 直流12V,1A)
 Contact Resistance: 80 mohm Max. at working height.
 接触电阻, 最大80毫欧(在工作高度状态下)
- 4: Mechanical(机械性能):
 Force: 300±20%gf at working height.(300±20%gf在工作高度时)
 Full stroke: 3.00mm(全行程, 3.00mm)
 Durability: 10000 cycles(min)(寿命, 10000次)



				DRAWN: Ken Wang	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15		DESCRIPTION: Pogo Pin Double Contacts L=18.6mm	SIZE A4
E				CHECKED: Lily Chou	UNIT: MM			
D				APPROVAL: Chao Peng	SCALE:2:1	PART NO: PG-D50-L1860G		
C					SHEET: 1 / 1			
B					PROJECTION: 			
A	07-Dec-2017	(H0032)	Ken Wang					
REV	DATE	FILE	BY					