



Specifications:

Current Rating:3.0 Amps
 Voltage Rating:250V AC/DC
 Contact Resistance:20mohm max.
 Insulation Resistance:1,000M ohm min.
 Withstanding Voltage:500V For One Minute
 Operating Temperature:-25°C ~ +105°C
 Material

Insulator:High Temp.Plastic(PBT UL94V-0)
 Standard Color:Black
 Contact:Copper Alloy
 Plating:Gold Plated

How To Order

PHRD254-XXX-811527W55

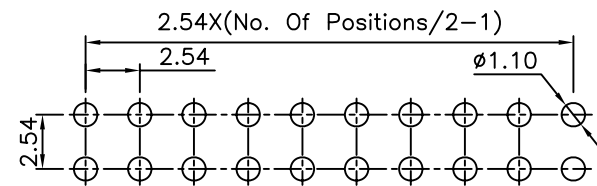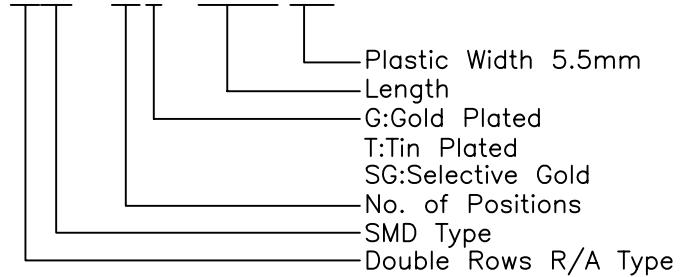

PCB Layout

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 2.54mm Pin Header R/A Dip Type	SIZE A4
E								
D				CHECKED: Lily Chou	UNIT: MM	PART NO: PHRD254-XXG-811527W55		
C					SCALE: 1:1			
B				APPROVAL: Chao Peng	SHEET: 1 / 1			
A	09-May-2023	(PC0001)	Ken		PROJECTION:			
REV	DATE	FILE	BY					