

Specifications:

Current rating:1.0 Amps

Voltage rating:50V AC/DC

Contact resistance:20mohm max.

Insulation resistance:1,000Mohm min.

Withstanding Voltage:500V For One Minute

Operating Temperature:-25°C ~ +105°C

Material

Insulator:High Temp.Plastic(Nylon 6T UL94V-0)



Standard Color:Black

Contact:Copper Alloy

Plated:Tin Plated

How To Oorder

PHVD127-XXG-800

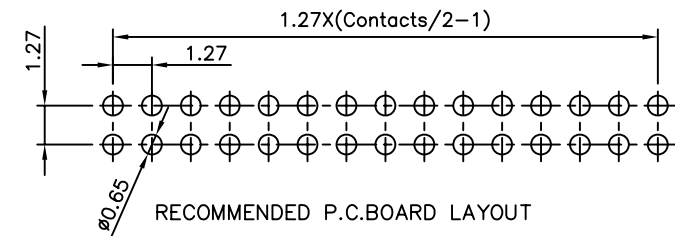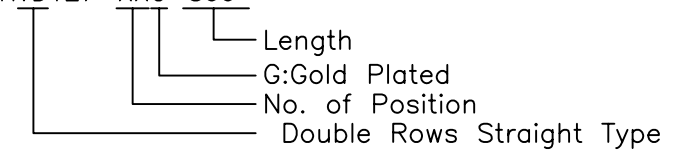

| | | | | | | | | |
|-----|-------------|----------|-----|-----------|-----------------------|--------------------------|--|-------------------|
| F | | | | DRAWN: | GENERAL TOLERANCE: | | DESCRIPTION: 1.27mm Pin Header Double Row Straight Type | SIZE A4 |
| E | | | | Ken | .X=±0.20 .XX=±0.15 | | | |
| D | | | | CHECKED: | UNIT: MM | PART NO: PHVD127-XXG-800 | | |
| C | | | | Lily Chou | SCALE: 1:1 | | | |
| B | | | | APPROVAL: | SHEET: 1 / 1 | | | |
| A | 24-Dec-2019 | (PC0001) | Ken | Chao Peng | PROJECTION: | | | |
| REV | DATE | FILE | BY | | | | | |