



1

2

3

4

5

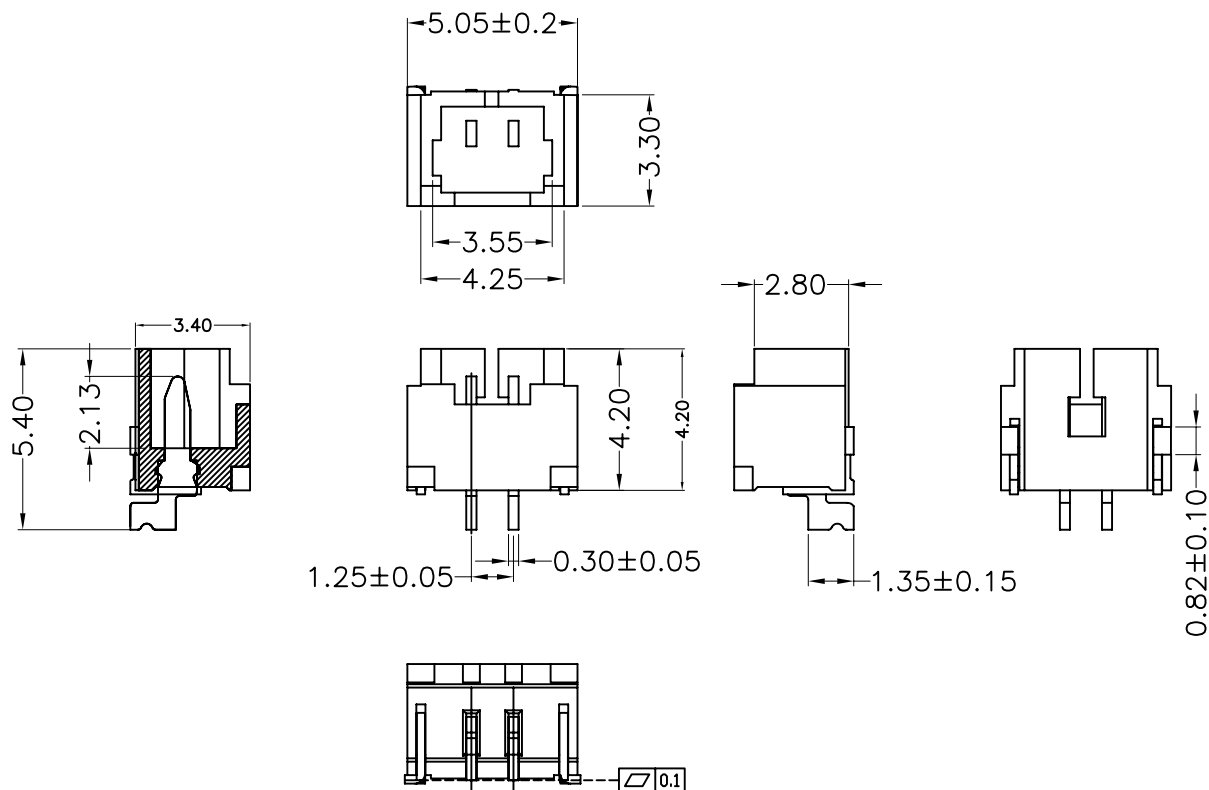

Specifications:


Current rating:1.0A AC,DC
 Voltage rating:125V AC,DC
 Contact resistance:20m ohm.Max
 Insulation resistance:100M ohm.Min
 Withstanding voltage:250V AC/minute
 Operating temperature range: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Material:

Insulator:High Temp. Plastic(Nylon 9TL94V-0)
 Insulator Color:White
 Contact:Phosphor Bronze
 Plated:Tin Plated
 Package:2000pcs/Reel

How To Order:

WF5RSM125-02-TR

— Tape & Reel
 — No. Of Position
 — Right Angle SMT Type

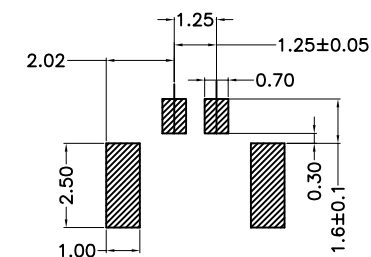

PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION:	SIZE		
E				Ken	.X = ± 0.20				1.25mm Wafer R/A SMT Type	A4
D				CHECKED:	.XX = ± 0.15					
C				Lily Chou	UNIT: MM					
B	26-Jul-2016	Amend Metal Tab	Ken	APPROVAL:	SCALE: 1:1	PART NO:				
A	30-May-2016	(PC0001)	Ken	Chao Peng	SHEET: 1 / 1	WF5RSM125-02-TR				
REV	DATE	FILE	BY		PROJECTION:					