


Dimension:

Contacts	A	B	C	D
10	12.10	5.00	8.10	7.50
20	18.35	11.25	14.35	13.75
30	24.60	17.50	20.60	20.00
40	30.85	23.75	26.85	26.25

Specifications:


Current Rating:1.0A AC/DC
 Voltage Rating:125V AC/DC
 Contact Resisitance:20m ohm. Max.
 Insulation Resisitance:100M ohm. Min.
 Withstanding Voltage:250V AC/minute
 Operating Temperature Range :-40°C~+85°C
 Material and Finish
 Insulator:High Temp. Plastic (Nylon 6T UL94V-0)
 Insulator Color:Beige
 Contact:Brass Gold Plated
 Metal Tab:Brass Tin Plated



How To Order:

WFBSM125-XX-XX-CR

CR:Cap and Tape&Reel
 Blank with Post
 01:Without Post
 Number of Contacts
 BSM:Double Rows SMD Type

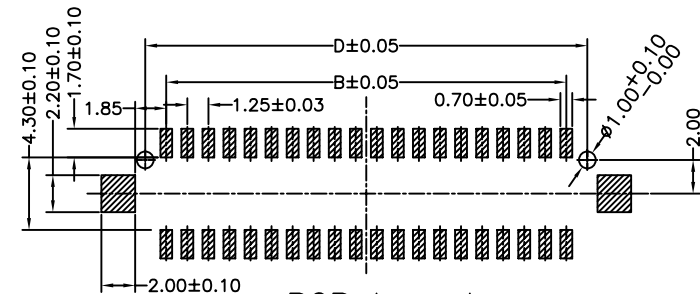

PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION:	SIZE
E				Ken	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM	1.25mm Wafer Double Row SMT Type	A4	
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 1	PART NO:	A4	
A	01-SEP-2013	(PC0001)	Ken	Chao Peng	PROJECTION:			WFBSM125-XX-XX-CR
REV	DATE	FILE	BY					