


Even Positions
04P,08P,12P,16P

Odd Positions
06P,10P,14P

Circuits	Dimension			Circuits	Dimension		
	A	B	C		A	B	C
4	2.50	5.94	8.22	12	12.50	15.94	18.22
6	5.00	8.44	10.72	14	15.00	18.44	20.72
8	7.50	10.94	13.22	16	17.50	20.94	23.22
10	10.00	13.44	15.72				

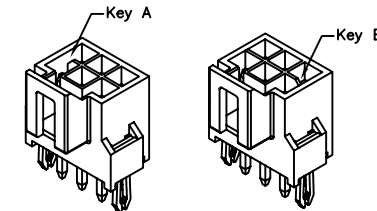

Specifications:

Current Rating:6.5A AC,DC
Voltage Rating:250V AC,DC
Contact Resistance:10mohm Max
Insulation Resistance:1000Mohm Min.
Withstanding Voltage:1500V AC/minute
Operating Temperature Range:-40°C~+105°C


Material And Finish:

Insulator:High Temp. Plastic(LCP UL94V-0)
Insulator Color:Black
Contact:Brass
Plating:Tin Plated

How To Order

WFV25-XXX-X-LKF-XX

- BK:Black
- WH:White
- LKF:With Lock+Fork
- A:A Key(only Black)
- B:B Key(Only White)
- G:Gold Plated
- T:Tin Plated
- No. Of Positions
- V:Straight Dip Type

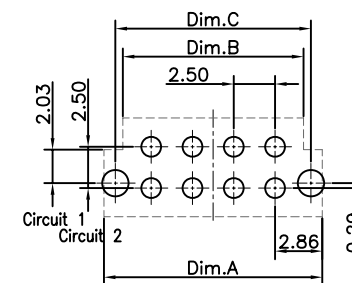

P.C.B LAYOUT

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 2.5mm Wafer Dip With Lock +Fork Type	SIZE A4
E				Ken	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM			
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 2	PART NO:		
A	05-Mar-2018	(PC0001)	Ken	Chao Peng	PROJECTION:	WFV25-XXX-X-LKF-XX		
REV	DATE	FILE	BY					


1

2


3

4


5




04P
KEY A




06P
KEY A




08P
KEY A





10P
KEY A




12P
KEY A




14P
KEY A




04P
KEY B




06P
KEY B




08P
KEY B





10P
KEY B




12P
KEY B



14P
KEY B

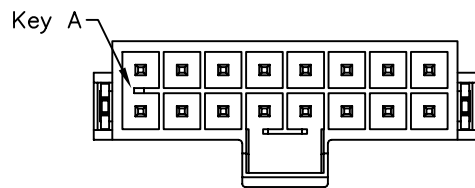



16P
KEY A

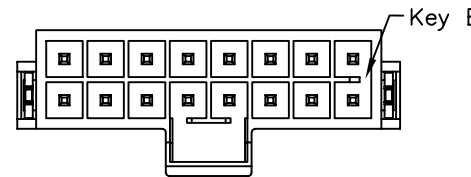

16P
KEY B

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 2.5mm Wafer Double Row Dip With Lock Type	SIZE A4
E								
D				APPROVAL: Chao Peng	SCALE: 1:1	PART NO: WFV25-XXX-X-LKF-XX		
C					PROJECTION: 			
B								
A	05-Mar-2018	(PC0001)	Ken					
REV	DATE	FILE	BY					