


Circuits	Dimensions	
	A	B
2X9P	8.00	11.30
2X10P	9.00	12.30
2X15P	14.00	17.30
2X16P	15.00	18.30
2X20P	19.00	22.30
2X25P	24.00	27.30

Specifications:
 Current Rating:0.8A AC,DC
 Voltage Rating:100V AC,DC
 Contact Resistance:20mohm Max
 Insulation Resistance:100Mohm Min.
 Withstanding Voltage:500V AC/minute
 Operating Temperature Range:-25°C~+85°C
 Material And Finish:
 Insulator:High Temp. Plastic(LCP UL94V-0)
 Insulator Color:Natural(Beigi)
 Contact:Copper Alloy
 Plating:Tin Plated
 Package:1000pcs/Reel

How To Order
 WFVDSM10-XXX-LK-CR

- Cap and Tape & Reel
- LK:With Lock
- C:Gold Plated
- T:Tin Plated
- SG>Selective Gold Plated
- No. Of Positions
- VDSM:Double Row SMT Type

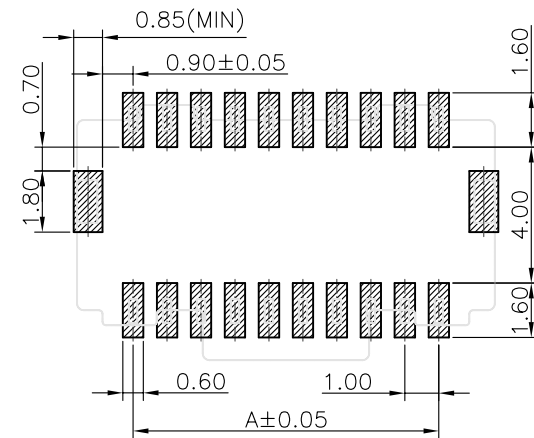

P.C.B LAYOUT
 GENERAL TOLERANCES:±0.05

RoHS Compliant

F			
E			
D			
C			
B			
A	05-Mar-2021	(PC0001)	Ken
REV	DATE	FILE	BY

DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15
CHECKED: Lily Chou	
APPROVAL: Chao Peng	UNIT: MM
	SCALE: 1:1
	SHEET: 1 / 1
	PROJECTION:

		DESCRIPTION: 1.0mm Wafer Double Row SMT With Lock Type
		PART NO: WFVDSM10-XXX-LK-CR

SIZE A4
