

Specifications


Current Rating:0.5A AC/DC
 Voltage Rating:100V AC/DC
 Contact Resistance:40m ohm. Max
 Insulation Resistance:100Mohm min
 Withstanding Voltage:500V(r.m.s) For one Minute
 Operating Temperature Range:-40°C to 105°C
 Material and Finish
 Insulator:High Temp. Plastic(Nylon 9T UL94V-0)
 Color:Beige

Contact :Copper Alloy
 Plated:Gold Plated
 Package:1000pcs/Reel

How To Order:

BBS08-XXG-780-XX-CR

- Cap+Tape&Reel
- Blank With Post
- PN:Without Post
- Height 7.8mm
- Gold Plated
- No. of Contacts(12~80P)

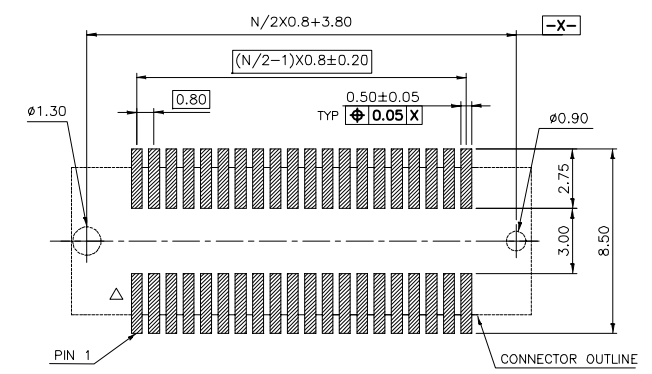

RECOMMENDED PCB LAYOUT
 TOLFRANCF: +0.05

RoHS Compliant

F				DRAWN:	Ken
E				CHECKED:	Lily Chou
D				APPROVAL:	Chao Peng
C					
B					
A	11-Sep-2018	(PC0001)	Ken		
REV	DATE	FILE	BY		

GENERAL TOLERANCE:	.X=±0.20 .XX=±0.15
UNIT:	MM
SCALE:	1:1
SHEET:	1 / 1
PROJECTION:	

DESCRIPTION:	0.8mm Board To Board Socket 7.8mm Height SMT Type
PART NO:	BBS08-XXG-780-XX-CR



SIZE
A4