
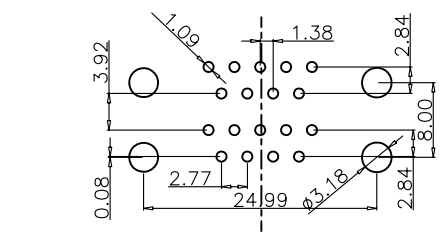


DIM A	DIM B
15.88	28.43
19.05	31.60

Specifications:
 Current Rating:3.0A AC,DC
 Voltage Rating:250V AC,DC
 Temperature Range:-40°C ~ +85°C
 Contact Resistance:30mohm max.
 Insulation Resistance:5,000Mohm min.
 Withstanding Voltage:1,000V AC/Minute
 Materials:
 Insulator:High Temp. Plastic (UL 94V-0)
 Contact:Copper Alloy
 Plating:Gold Plated on Contact Area,
 Tin Plated on Solder Tail.
 Shell:Metal Iron with Nickel plated
 How To Order
 DBDR-09P09S-XX-XXX

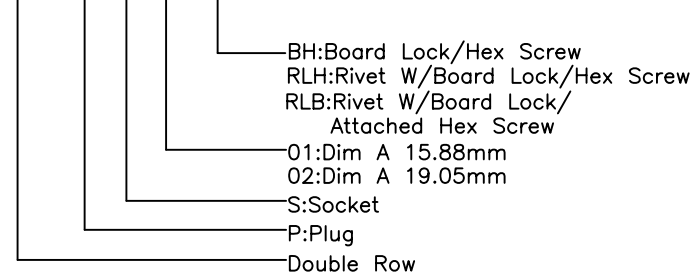

RECOMMENDED PCB LAYOUT THICKNESS=1.6mm
 TOLERANCE:±0.05

RoHS Compliant

E				DRAWN: Jack Zhou	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15		DESCRIPTION: D-SUB 9P Plug + 9P Socket Footprint Right Angle Type	SIZE A4
D				CHECKED: Ken Wang				
C				APPROVAL: Make Hu	UNIT: MM	PART NO: DBDR-09P09S-XX-XXX		
B					SCALE:2:1			
A	20-Mar-2017	(PC0036)	Jack Zhou	SHEET: 1 / 1	PROJECTION:			
REV	DATE	FILE	BY					