


RoHS Compliant

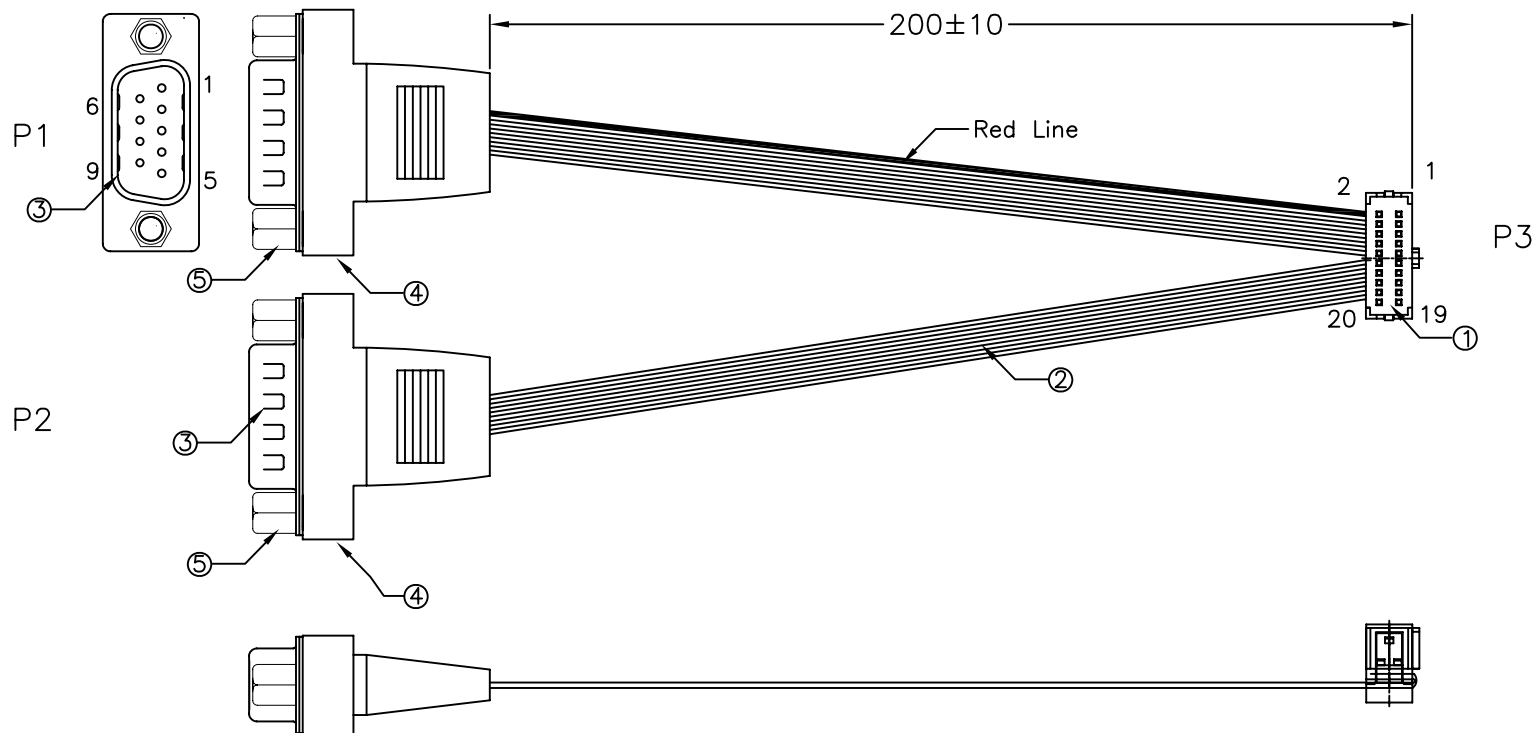

PIN OUT:

P1	P3	P2	P3
1 红边	1	1	11
2	2	2	12
3	3	3	13
4	4	4	14
5	5	5	15
Shell		Shell	
6	6	6	16
7	7	7	17
8	8	8	18
9	9	9	19
NC	10	NC	20

铁壳跳线短路

Note: 单条PE袋包装, 贴客人料号贴纸, 20pcs/包, 不封口, 附单条PE及标签

OALES-BKU2NB
G11SE190

ITEM	PART NO.	DESCRIPTION	QTY
1	IDC254B-20SR	2.54*1.27MM IDC SOCKET 20WAYS With Strain Relief	1
2	830-0635-20C	0.635MM FLAT CABLE UL 2678 30AWG 20C GREY PVC	1
3	DBOP-09-BU	D-sub 9P Male Solder Type Blue	2
4	S-DB-09-BK-ABS	D-sub 快速壳ABS Black W、#4-40UNC NUT	2
5	SCRW-11.8-475	Screw #4-40UNC 11.8*4.75MM Nickel	4

F				Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: IDC FLAT CABLE ASSEMBLY	SIZE A4	
E			CHECKED: Lily Chou						UNIT: MM
D			APPROVAL: Chao Peng						SCALE: 1:1
C	04-Nov-2019	Amend DB Blue	Ken		SHEET: 1 / 1	PART NO:	FCA-IDC254B-20D-220		
B	30-Oct-2019	Add SR and Label	Ken		PROJECTION:	(Cus P/N:OALES-BKU2NB)			
A	22-Oct-2019	(H0049)	Ken						
REV	DATE	FILE	BY						