


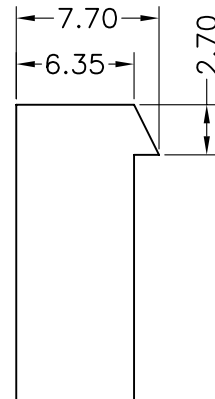


Section:B-B

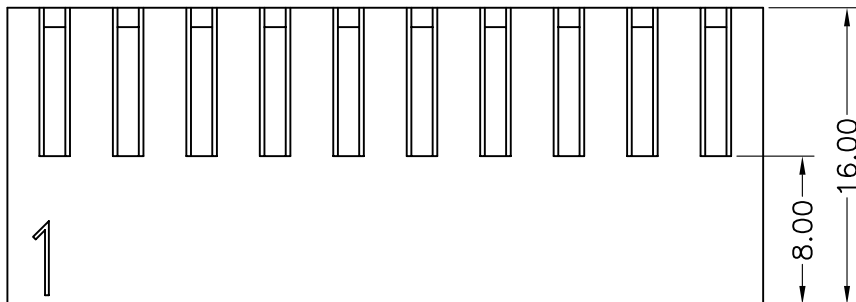

Section:A-A

HAT396T

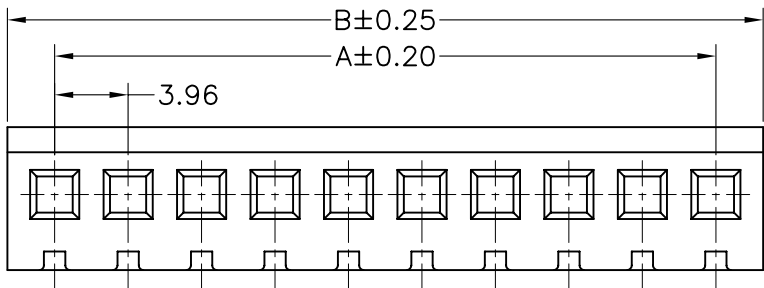

Specifications:

Current Rating:7.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20M ohm. Max.
 Insulation Resistance:1000M ohm. min.
 Withstanding Voltage:1500V AC/Minute
 Operating Temperature Range:-40°C ~ +105°C
 Application Wire:Awg 18~22
 Materials And Finish
 Insulator:Nylon66 (UL94V-2)
 Color:Transparent White
 Contact:Phosphor Bronze
 Plating:Tin Plated

How To Order
 HA396-XX

└── No.of Positions
 └── Housing

Dimension Information:

Circuits	DIM:(mm)		Circuits	DIM:(mm)	
	A	B		A	B
2	3.96	8.22	9	31.68	35.94
3	7.92	12.18	10	35.64	39.90
4	11.88	16.14	11	39.60	43.86
5	15.84	20.10	12	43.56	47.82
6	19.80	24.06	13	47.52	51.78
7	23.76	28.02	14	51.48	55.74
8	27.72	31.98	15	55.44	59.70

RoHS Compliant

F			
E			
D			
C			
B			
A	01-SEP-2012	(PC0001)	Ken
REV	DATE	FILE	BY

DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15
CHECKED: Lily Chou	
APPROVAL: Chao Peng	UNIT: MM
	SCALE: 1:1
	SHEET: 1 / 1
	PROJECTION:

		DESCRIPTION: 3.96mm Socket Housing & Terminal
		PART NO: HA396-XX & HAT396T

SIZE A4
