
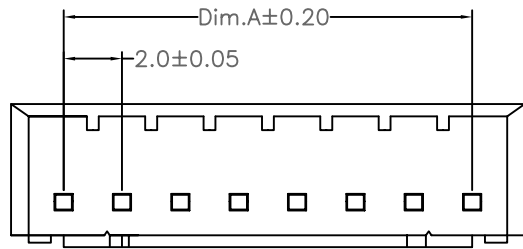



SECTION C-C


SECTION B-B

SECTION A-A

HBT20T

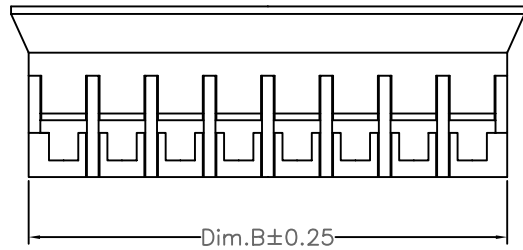

HB20-XX

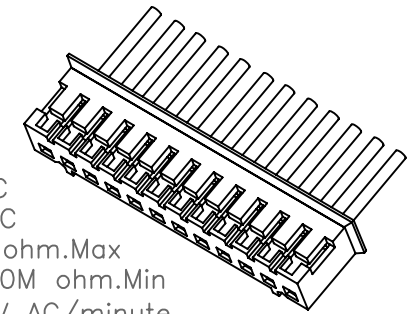

Specifications:

Current rating:2.0A AC,DC  
 Voltage rating:125V AC,DC  
 Contact resistance:20m ohm.Max  
 Insulation resistance:1000M ohm.Min  
 Withstanding voltage:500V AC/minute  
 Operating temperature range:-40°C~+85°C  
 Material and Finish  
 Insulator:Nylon 66 (UL94V-V2)  
 Insulator Color:Ivory  
 Contact:Phosphor Bronze  
 Plated:Tin Plated  
 Applicable Wire:Awg#24~#30

How To Order:  
 HB20-XX

Number of Circuits

Dimension:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
2	2.00	4.60	10	18.00	20.60
3	4.00	6.60	11	20.00	22.60
4	6.00	8.60	12	22.00	24.60
5	8.00	10.60	13	24.00	26.60
6	10.00	12.60	14	26.00	28.60
7	12.00	14.60	15	28.00	30.60
8	14.00	16.60	16	30.00	32.60
9	16.00	18.60			

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 2.0mm Female Housing & Terminal	SIZE <b>A4</b>
E				CHECKED: Lily Chou				
D				APPROVAL: Chao Peng	SCALE: 1:1	PART NO: HB20-XX & HBT20T		
C					SHEET: 1 / 1			
B				PROJECTION:				
A	01-SEP-2013	(PC0001)	Ken					
REV	DATE	FILE	BY					