


1

2


3

4


5

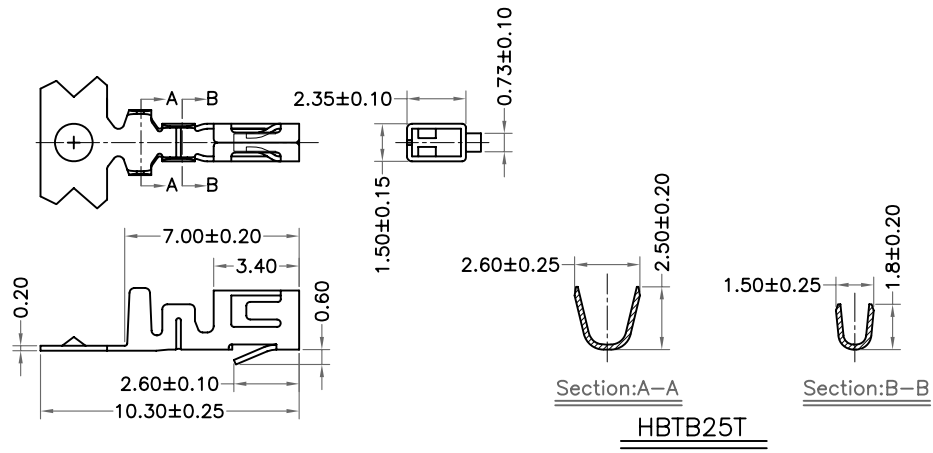

HBTB25T

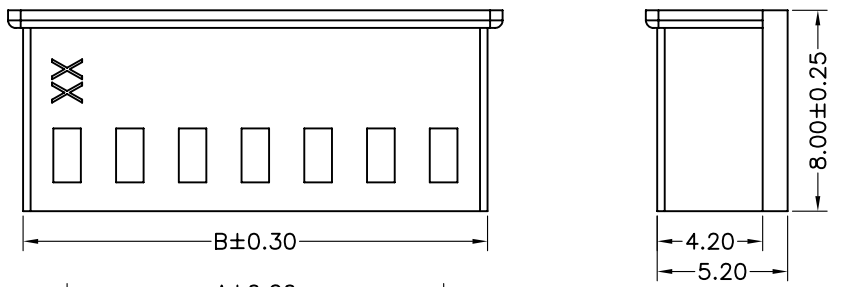

HB25-XX



Specifications:  
 Current Rating:3.0A AC,DC  
 Voltage Rating:250V AC,DC  
 Contact Resistance:20mΩmax  
 Insulation Resistance:1000MΩmin  
 Withstanding Voltage:1000V AC/minute  
 Temperature Range: -40°C to +85°C  
 Application Wire: Awg#22~#30  
 Material:  
 Insulator:Nylon 66 (UL94V-0)  
 Insulator Color:White  
 Contact:Brass  
 Plated;Tin Plated  
 How To Order:  
 Hn25-XX

No.of Contact

Dimension:

Circuits	DIM.A	DIM.B	Circuits	DIM.A	DIM.B
2	2.50	6.00	8	17.50	21.00
3	5.00	8.50	9	20.00	23.50
4	7.50	11.00	10	22.50	26.00
5	10.00	13.50	11	25.00	28.50
6	12.50	16.00	12	27.50	31.00
7	15.00	18.50			

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 2.5mm Female Housing & Terminal	SIZE <b>A4</b>
E			Ken	.X=±0.20 .XX=±0.15				
D			CHECKED:	UNIT: MM				
C			Lily Chou	SCALE: 1:1				
B			APPROVAL:	SHEET: 1 / 1	PART NO:	HB25-XX		
A	01-SEP-2016	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					