



1 2 3 4 5

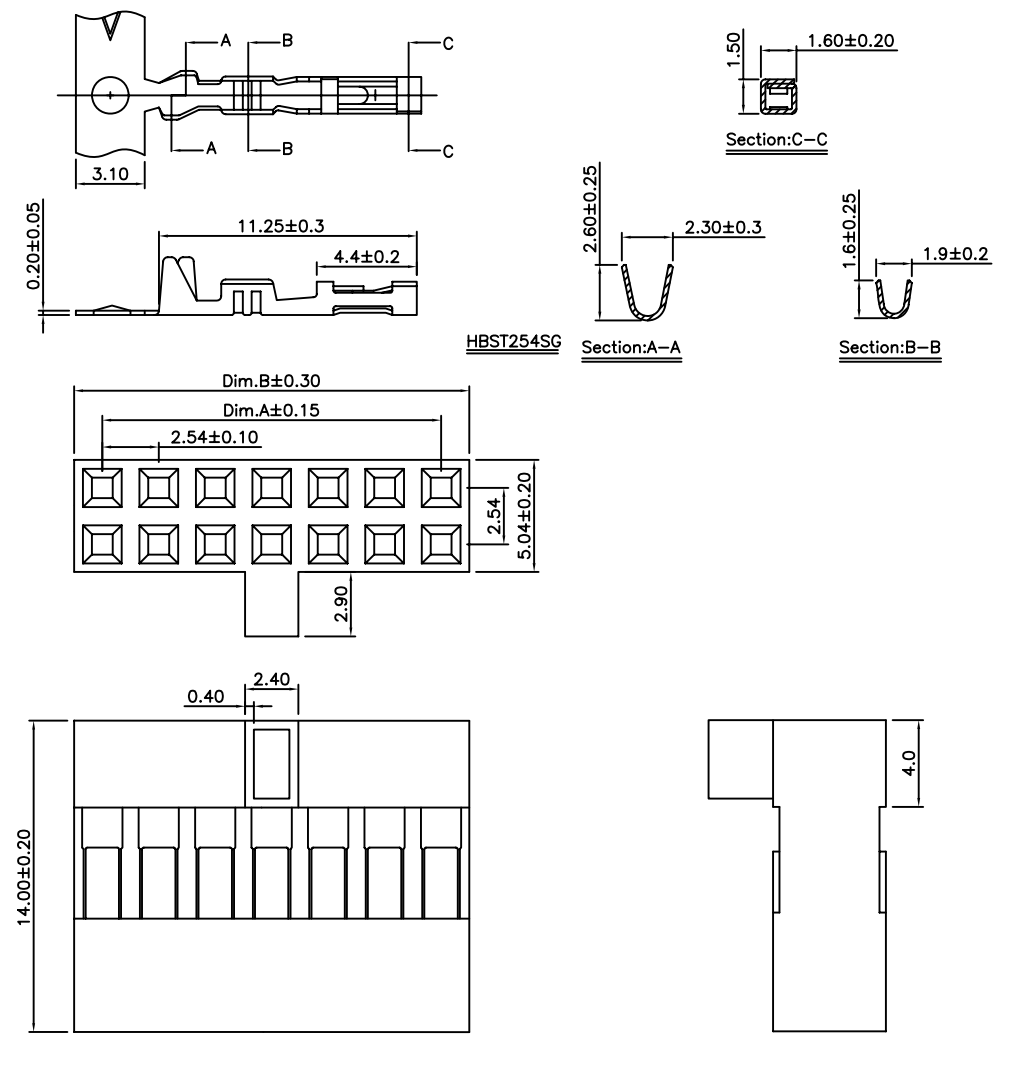

Specifications:  
 Current Rating:3.0A AC/DC  
 Voltage Rating:250V AC/DC  
 Contact Resistance:15m ohm. max.  
 Insulation Resistance:1000M ohm. Min.  
 Withstanding voltage:600V AC For One Minute  
 Operating Temperature Range:-25°C to +105°C  
 Material and Finish  
 Insulator:PBT UL94V-0  
 Contact:Copper Alloy  
 Plating:Gold Plated  
 How To Order  
 HB254-XX-PK  
 With Bump  
 No. of Positions  
 B:Double Rows

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
4	2.54	5.08	24	27.94	30.48
6	5.08	7.62	26	30.48	33.02
8	7.62	10.16	28	33.02	35.56
10	10.16	12.70	30	35.56	38.10
12	12.70	15.24	32	38.10	40.64
14	15.24	17.78	34	40.64	43.18
16	17.78	20.32	36	43.18	45.72
18	20.32	22.86	38	45.72	48.26
20	22.86	25.40	40	48.26	50.80
22	25.40	27.94			

RoHS Compliant

F			
E			
D			
C			
B			
A	01-SEP-2009	(QC01)	Ken
REV	DATE	FILE	BY

DRAWN: Ken  
 CHECKED: Lily Chou  
 APPROVAL: Chao Peng  
 GENERAL TOLERANCE:  
 .X=±0.20  
 .XX=±0.15  
 UNIT: MM  
 SCALE: 1:1  
 SHEET: 1 / 1  
 PROJECTION:

**HOYATO**  
 Connector supplies  
 DESCRIPTION: 2.54mm Housing  
 Double Row With Bump  
 PART NO: HB254-XX-PK

SIZE  
**A4**