

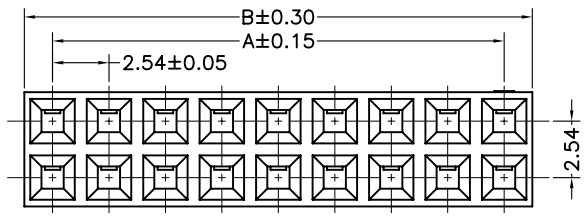
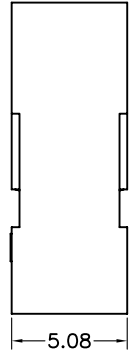


HAT254TSG

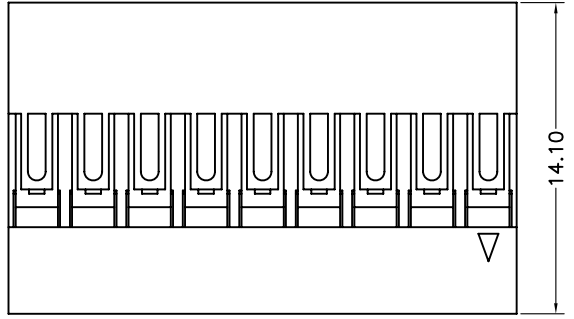

HB254-XX



Specifications:
 Current Rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:15m ohm. max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding voltage:600V AC For One Minute
 Operating Temperature Range:-25°C to +105°C
 Material and Finish
 Insulator:Nylon 66 UL94V-0
 Contact:Copper Alloy
 Plating:Gold Plated
 How To Order
 HB254-XX

No. of Positions
 B:Double Rows

Dimension

| Circuits | Dimention | | Circuits | Dimention | |
|----------|-----------|-------|----------|-----------|-------|
| | Dim.A | Dim.B | | Dim.A | Dim.B |
| 4 | 2.54 | 5.08 | 28 | 33.02 | 35.56 |
| 6 | 5.08 | 7.62 | 30 | 35.56 | 38.10 |
| 8 | 7.62 | 10.16 | 32 | 38.10 | 40.64 |
| 10 | 10.16 | 12.70 | 34 | 40.64 | 43.18 |
| 12 | 12.70 | 15.24 | 36 | 43.18 | 45.72 |
| 14 | 15.24 | 17.78 | 38 | 45.72 | 48.26 |
| 16 | 17.78 | 20.32 | 40 | 48.26 | 50.80 |
| 18 | 20.32 | 22.86 | 42 | 50.80 | 53.34 |
| 20 | 22.86 | 25.40 | 44 | 53.34 | 55.88 |
| 22 | 25.40 | 27.94 | 46 | 55.88 | 58.42 |
| 24 | 27.94 | 30.48 | 48 | 58.42 | 60.96 |
| 26 | 30.48 | 33.02 | 50 | 60.96 | 63.50 |

RoHS Compliant

| | | | |
|-----|-------------|--------|-----|
| F | | | |
| E | | | |
| D | | | |
| C | | | |
| B | | | |
| A | 01-SEP-2009 | (QC01) | Ken |
| REV | DATE | FILE | BY |

| | |
|------------------------|---|
| DRAWN: Ken | GENERAL TOLERANCE: .X=±0.20 .XX=±0.15 |
| CHECKED: Lily Chou | |
| APPROVAL: Chao Peng | UNIT: MM |
| | SCALE: 1:1 |
| | SHEET: 1 / 1 |
| | PROJECTION: |

| | |
|---|---------------------------------|
| DESCRIPTION: 2.54mm Housing Double Row + Terminal | PART NO: HB254-XX &HAT254TSG |
| | |

SIZE
A4