



Specification:

Current rating:2.0A AC/DC  
 Voltage rating:125V AC/DC  
 Contact resistance:20mohm max.  
 Insulation resistance:1000Mohm min.  
 Withstand voltage:500V AC/Minute  
 Operating temperature range:-40°C to +105°C  
 Applicable Wire:Awg 22~28  
 Material and Finish:  
 Material:Nylon 66 (UL94V-0)  
 Insulator Color:White  
 Contact:Phosphor Bronze  
 Plating:Tin Plated

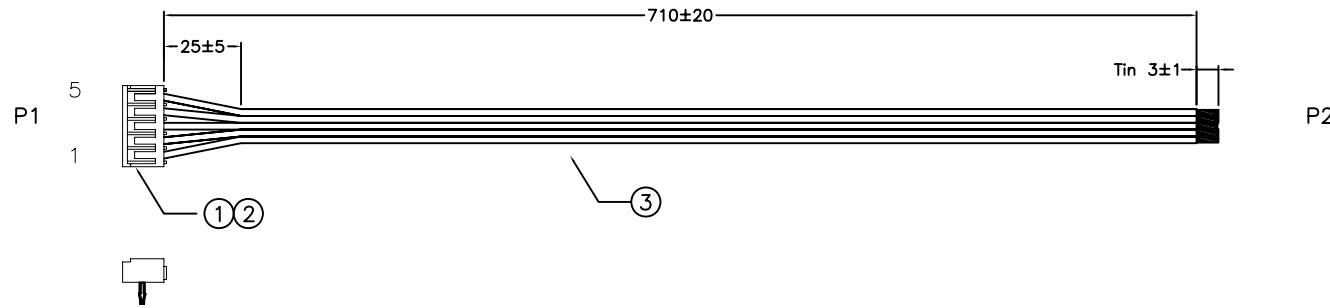

PIN OUT:

P1		P2	
1	Red	Tin	
2	Grey	Tin	
3	Grey	Tin	
4	Grey	Tin	
5	Grey	Tin	

ITEM	PART NO.	DESCRIPTION	Q'TY
1	HR20-06	2.0MM WIRE TO BOARD-IN HOUSING 5WAYS	1
2	HRT20T	2.0MM WIRE TO BOARD-INTERMINAL Plated Tin	5
3	830-127-05C	1.27MM Flat Cable UL2651 28AWG color Grey	1

F				DRAWN: Tom	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15		DESCRIPTION: 2.0MM PHD Board-in Housing WIRE HARNESS	SIZE <b>A4</b>
E								
D				CHECKED: Ruby	UNIT: MM	PART NO: HCA-HR20-05-710		
C					SCALE:			
B				APPROVAL: Mike Wu	SHEET: 1 / 1			
A	31-Jul-2019	(H0049)	Ken		PROJECTION:			
REV	DATE	FILE	BY					