



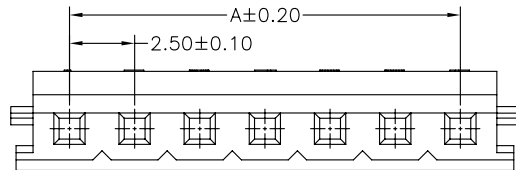


Section:B-B



Section:A-A

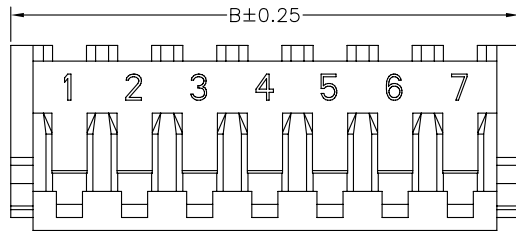

Specifications:

Current Rating:3.0A AC,DC  
 Voltage Rating:250V AC,DC  
 Contact Resistance:20mΩmax  
 Insulation Resistance:1000MΩmin  
 Withstanding Voltage:1000V AC/minute  
 Temperature Range: -40°C to +85°C  
 Application Wire: Awg#22~#30  
 Material:

Insulator:Nylon 66 (UL94V-0)  
 Insulator Color:White

Contact:Brass  
 Plated;Tin Plated

How To Order:  
 HEH25-XX-XX

Blank: White(Standard)  
 YL: Yellow; RD: Red; BU: Blue  
 No.of Contact

Dimension:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
2	2.50	7.00	9	20.00	24.50
3	5.00	9.50	10	22.50	27.00
4	7.50	12.00	11	25.00	29.50
5	10.00	14.50	12	27.50	32.00
6	12.50	17.00	13	30.00	34.50
7	15.00	19.50	14	32.50	37.00
8	17.50	22.00	15	35.00	39.50

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 2.5mm EH Female Housing & Terminal	SIZE <b>A4</b>
E				Ken	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM	PART NO: HEH25-XX-XX		
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 1			
A	01-SEP-2009	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					