




HJT20T




SECTION A-A





SECTION B-B



SECTION C-C

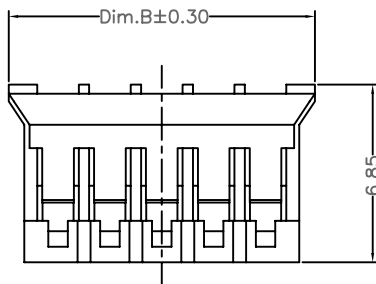

HJ20-XX



Specification:

Current Rating: 2.0A AC/DC  
 Voltage Rating: 125V AC/DC  
 Contact Resistance: 20mohm max.  
 Insulation Resistance: 1000Mohm min.  
 Withstand Voltage: 500V AC/Minute  
 Operating Temperature Range: -40°C to +125°C  
 Material and Finish:  
 Material: High Temp. Plastic (Nylon 66 UL94V-0)  
 Insulator Color: Black  
 Contact: Phosphor Bronze  
 Plating: Tin Plated  
 Wire Range: AWG #24~#28

How To Order:

HJ20-XX

└─── Number of Circuits

Dimension:

Circuits	DIM.A	DIM.B	Circuits	DIM.A	DIM.B
2	2.00	5.20	10	18.00	21.20
3	4.00	7.20	11	20.00	23.20
4	6.00	9.20	12	22.00	25.20
5	8.00	11.20	13	24.00	27.20
6	10.00	13.20	14	26.00	29.20
7	12.00	15.20	15	28.00	31.20
8	14.00	17.20	16	30.00	33.20
9	16.00	19.20			

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X = ±0.20 .XX = ±0.15		DESCRIPTION: 2.0mm Housing & Terminal	SIZE <b>A4</b>
E								
D				CHECKED: Lily Chou	UNIT: MM	PART NO: HJ20-XX		
C					SCALE: 1:1			
B				APPROVAL: Chao Peng	SHEET: 1 / 1			
A	01-SEP-2013	(PC0001)	Ken		PROJECTION:			
REV	DATE	FILE	BY					