





HJT25T








Section:A-A



Section:B-B



Section:C-C

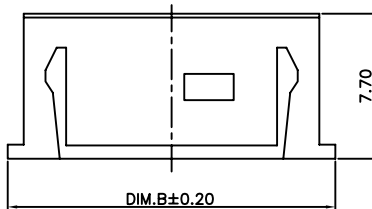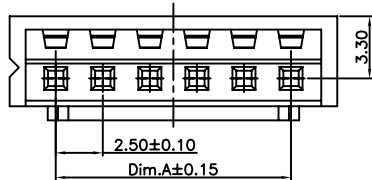

Specifications:

Current Rating:3.0A AC,DC
 Voltage Rating:250V AC,DC
 Contact Resistance:20mΩmax
 Insulation Resistance:1000MΩmin
 Withstanding Voltage:1000V AC/minute
 Temperature Range: -40°C to +85°C
 Application Wire: Awg#22~#30

Material:

Insulator:Nylon 66 (UL94V-0)
 Insulator Color:White

Contact:Brass
 Plated;Tin Plated

How To Order:

HJ25-XX-XX

Standard Color:White
 BK:Black/RD:Red/BU:Blue/GR:Grey
 No.of Contact

Dimension:

Circuits	DIM:(mm)		Circuits	DIM:(mm)	
	A	B		A	B
2	2.50	7.40	12	27.50	32.40
3	5.00	9.90	13	30.00	34.90
4	7.50	12.40	14	32.50	37.40
5	10.00	14.90	15	35.00	39.90
6	12.50	17.40	16	37.50	42.40
7	15.00	19.90	17	40.00	44.90
8	17.50	22.40	18	42.50	47.40
9	20.00	24.90	19	45.00	49.90
10	22.50	27.40	20	47.50	52.40
11	25.00	29.90			

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15	HOYATO 东莞好亚通电子厂 Connector supplies	DESCRIPTION: 2.5mm Female Housing & Terminal	SIZE A4
E								
D				APPROVAL: Chao Peng	SCALE: 1:1	PART NO: HJ25-XX-XX		
C					SHEET: 1 / 1			PROJECTION:
B								
A	01-SEP-2009	(PC0001)	Ken					
REV	DATE	FILE	BY					