





HJDT20T(PC0389)




Section:A-A'



Section:B-B'

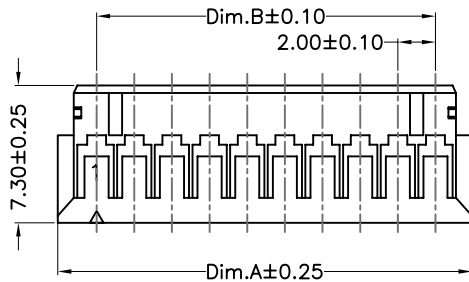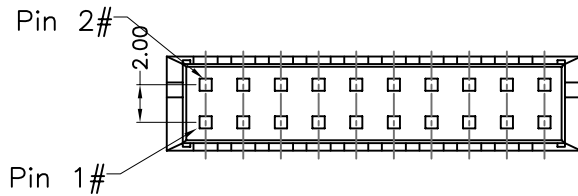

HJD20-XX



Specifications:

Current rating:2.0A AC,DC  
 Voltage rating:125V AC,DC  
 Contact resistance:20m ohm.Max  
 Insulation resistance:1000M ohm.Min  
 Withstanding voltage:500V AC/minute  
 Operating temperature range:-40°C~+85°C


Material:

Insulator:Nylon 66 (UL94V-0)  
 Insulator Color:White  
 Contact:Phosphor Bronze  
 Plated:Tin Plated

Applicable Wire:Awg#24~#28

How To Order:

HJD20-XX



Dimension:

Circuits	Dim.A	Dim.B	Circuits	Dim.A	Dim.B
4	5.90	2.00	24	25.90	22.00
6	7.90	4.00	26	27.90	24.00
8	9.90	6.00	28	29.90	26.00
10	11.90	8.00	30	31.90	28.00
12	13.90	10.00	32	33.90	30.00
14	15.90	12.00	34	35.90	32.00
16	17.90	14.00	36	37.90	34.00
18	19.90	16.00	38	39.90	36.00
20	21.90	18.00	40	41.90	38.00
22	24.00	20.00			

RoHS Compliant

F			
E			
D			
C			
B			
A	01-SEP-2009	(PC0001)	Ken
REV	DATE	FILE	BY

DRAWN: Ken  
 CHECKED: Lily Chou  
 APPROVAL: Chao Peng

GENERAL TOLERANCE:  
 .X=±0.20  
 .XX=±0.15  
 UNIT: MM  
 SCALE: 1:1  
 SHEET: 1 / 1  
 PROJECTION:



东莞好亚通电子厂

DESCRIPTION: 2.0mm Female Housing & Terminal

PART NO: HJD20-XX

SIZE

A4