









Specification:
 Current rating:2.0A AC/DC
 Voltage rating:125V AC/DC
 Contact resistance:20mohm max.
 Insulation resistance:1000Mohm min.
 Withstand voltage:500V AC/Minute
 Operating temperature range:-40°C to +85°C
 Material And Finish:
 Material:High Temp. Plastic (Nylon 66 UL94V-0)
 Insulator Color:White
 Contact:Phosphor Bronze
 Plating:Tin Plated
 How To Order
 1310HR-XX



No. of Contacts
 Housing R/A Type

Dimension:

Circuits	DIM.A	DIM.B	Circuits	DIM.A	DIM.B
2	2.00	4.50	10	18.00	20.50
3	4.00	6.50	11	20.00	22.50
4	6.00	8.50	12	22.00	24.50
5	8.00	10.50	13	24.00	26.50
6	10.00	12.50	14	26.00	28.50
7	12.00	14.50	15	28.00	30.50
8	14.00	16.50	16	30.00	32.50
9	16.00	18.50			

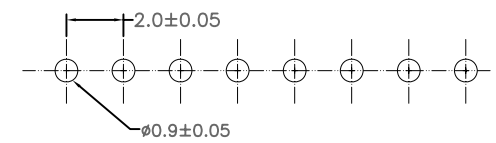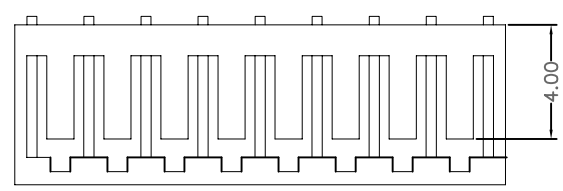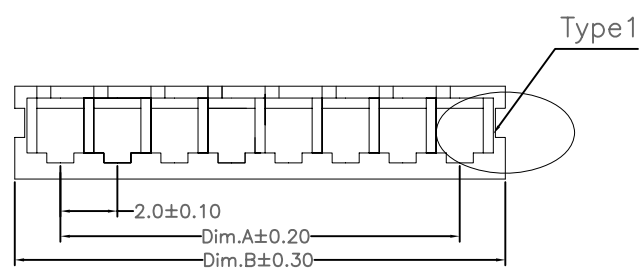

RoHS Compliant

E				DRAWN: OZR	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15		DESCRIPTION: 2.0mm Board-in Wire Housing & Terminal	SIZE A4
D				CHECKED: Jeremy Liu				
C				APPROVAL: Mike Wu	SCALE:	PART NO: HR20-XX & HRT20T		
B					SHEET: 1 / 1			
A	26-May-2016	(PUR160)	OZR	PROJECTION:				
REV	DATE	FILE	BY					