
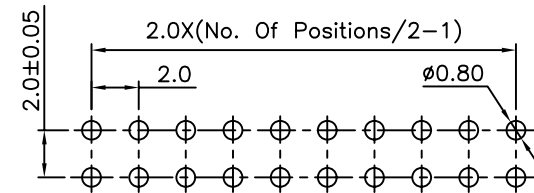


Specifications:

Current Rating:2.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:500V AC For One Minute
 Operating Temperature Range:-40° To+105°
 Material and Finish
 Insulator:High Temp. Plastic (UL94V-0)
 Insulator Color:Black
 Contact:Copper Alloy
 Plated:Gold Plated
 How To Order
 PHDI20-XXG-2300

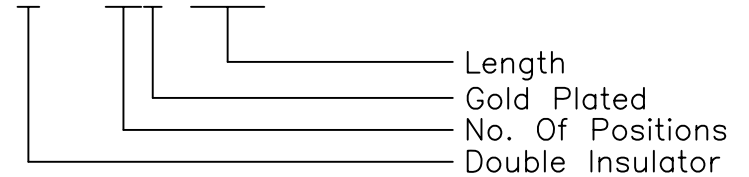

PCB Layout

RoHS Compliant

| | | | | | | | | |
|-----|-------------|--------|-----------|------------------------|--|-----------------------------|--|-------------------|
| | | | | DRAWN: Lily Chou | GENERAL TOLERANCE: .X=±0.2 .XX=±0.15 | | DESCRIPTION: 2.0mm Pin Header Double Insulator Type | SIZE A4 |
| E | | | | CHECKED: Ken Wang | UNIT: MM SCALE:2:1 | | | |
| D | | | | APPROVAL: Chao Peng | SHEET: 1 / 1 | PART NO: PHDI20-XXG-2300 | | |
| C | | | | | PROJECTION: | | | |
| B | | | | | | | | |
| A | 20-Jun-2017 | (YL01) | Lily Chou | | | | | |
| REV | DATE | FILE | BY | | | | | |