
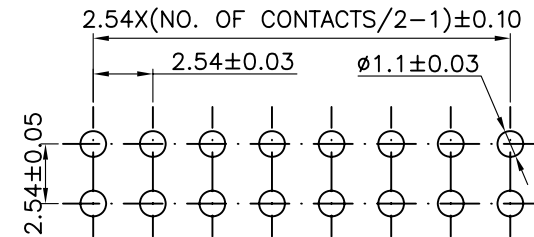


Specifications:

Current rating: 3.0A AC/DC
 Voltage rating: 250V AC/DC
 Contact resistance: 20m ohm. max.
 Insulation resistance: 1000M ohm. Min.
 Withstanding voltage: 600V AC for one minute
 Operating temperature range: -40°C to + 105°C

Material and Finish:
 Insulator: High Temp. Plastic (UL94V-0)
 Contact: Copper Alloy
 Plating: Gold Plated

How To Order
 PHDI254-XXG-2000

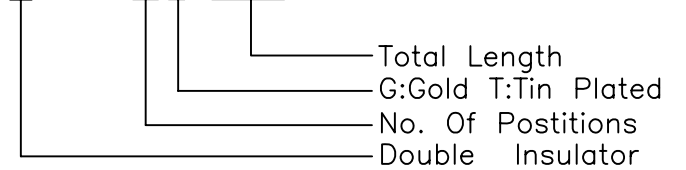

PCB Layout

				DRAWN: WGL	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15			
E				CHECKED: Jeremy Liu	UNIT: MM		DESCRIPTION: 2.54mm Pin Header Double Insulator Type	SIZE
D				APPROVAL: Mike Wu	SCALE: 2:1	PART NO: PHDI254-XXG-2000	A4	
C					SHEET: 1 / 1			
B					PROJECTION:			
A	11-Apr-2022	(PC0001)	WGL					
REV	DATE	FILE	BY					