





1

2

3

4

5

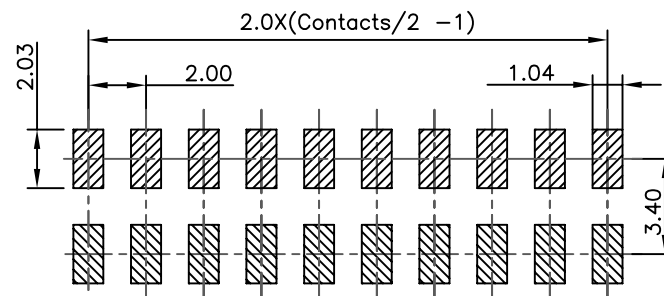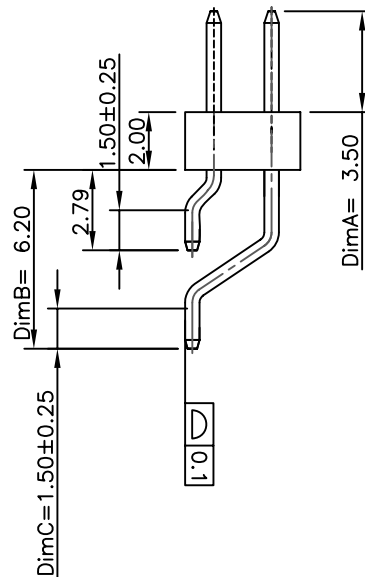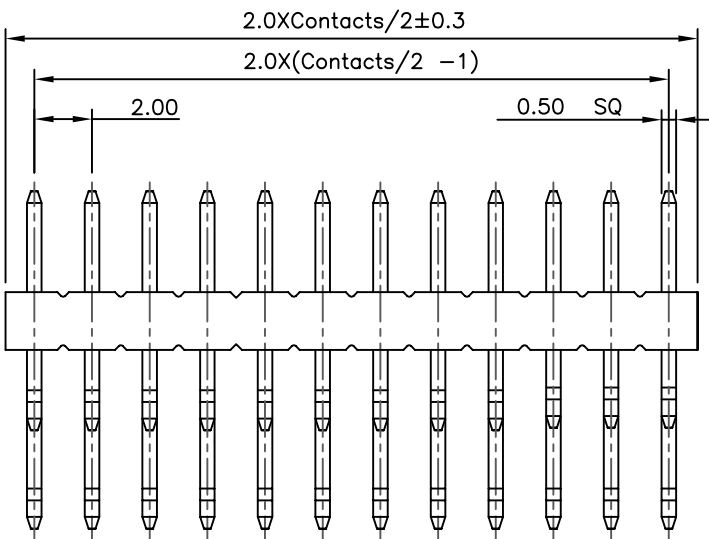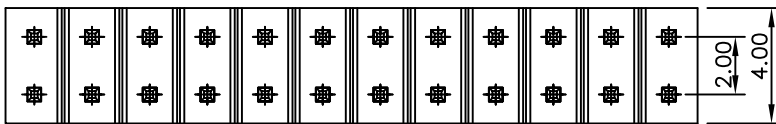

Specifications:
 Current Rating:2.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:500V AC For One Minute
 Operating Temperature Rating:-40°C ~ +105°C
 Material and Finish
 Insulator:High Temp. Plastic (Nylon6T UL94V-0)
 Insulator Color:Ivory
 Contact:Copper Alloy
 Plated:Gold Plated
 How To Order
 PHDRSM20-XXG-3562

Length
 G:Gold Plated
 No. Of Positions
 SMD Type

PCB Layout

RoHS Compliant

F				DRAWN:	Ken
E				CHECKED:	Lily Chou
D				APPROVAL:	Chao Peng
C					
B					
A	01-SEP-2009	(PC0001)	Ken		
REV	DATE	FILE	BY		

GENERAL TOLERANCE: .X=±0.20 .XX=±0.15
UNIT: MM
SCALE: 1:1
SHEET: 1 / 1
PROJECTION:

DESCRIPTION: 2.0mm Pin Header SMD R/A Type Double Rows	SIZE
PART NO: PHDRSM20-XXG-3562	A4

A

B

C

D