
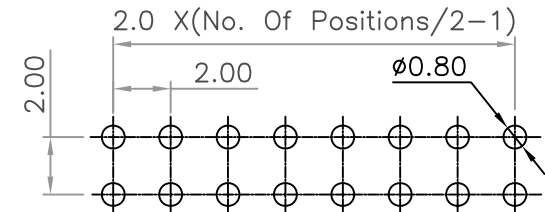


Specifications:

Current Rating: 2.0A AC/DC
 Voltage Rating: 250V AC/DC
 Contact Resistance: 20m ohm. max.
 Insulation Resistance: 1,000M ohm. min.
 Withstanding Voltage: 500V AC For One Minute
 Operating Temperature Rating: -40°C ~ +105°C
 Material and Finish
 Insulator: High Temp. Plastic (Nylon 6T UL94V-0)
 Insulator Color: Black
 Contact: Copper Alloy
 Plating: Gold Plated

How To Order
 PHDRW20-XXG

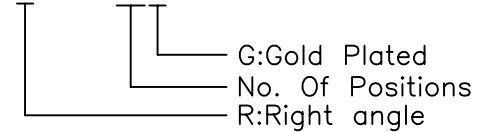

PCB Layout

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X = ±0.20 .XX = ±0.15		DESCRIPTION: 2.0mm Pin Header Double Row Right Angle Type	SIZE A4
E								
D				CHECKED: Lily Chou	UNIT: MM	PART NO: PHDRW20-XXG		
C					SCALE: 1:1			
B				APPROVAL: Chao Peng	SHEET: 1 / 1			
A	01-SEP-2009	(PC0001)	Ken		PROJECTION:			
REV	DATE	FILE	BY					