


PCB Layout

Specifications:
 Current Rating:1.0 Amps
 Voltage Rating:50V AC/DC
 Contact Resistance:20mohm max.
 Insulation Resistance:1,000M ohm min.
 Withstanding Voltage:500V For One Minute
 Operating Temperature:-25°C ~ +105°C
 Material
 Insulator:High Temp.Plastic(Nylon 6T UL94V-0)
 Standard Color:Black
 Contact:Copper Alloy
 Plating:Gold Plated
 How To Order
 PHDSM127-XXG-3025

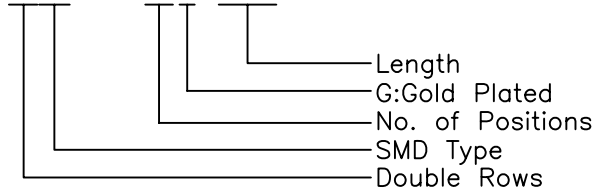

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 1.27mm Pin Header SMT Type	SIZE A4
E			Ken	.X=±0.20 .XX=±0.15				
D			CHECKED:	UNIT: MM				
C			Lily Chou	SCALE: 1:1				
B			APPROVAL:	SHEET: 1 / 1	PART NO:	PHDSM127-XXG-3025		
A	11-Sep-2018	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					