


PCB Layout

Specifications:  
 Current Rating:1.0 Amps  
 Voltage Rating:50V AC/DC  
 Contact Resistance:20mohm max.  
 Insulation Resistance:1,000M ohm min.  
 Withstanding Voltage:500V For One Minute  
 Operating Temperature:-25°C ~ +105°C  
 Material  
 Insulator:High Temp.Plastic(Nylon 6T UL94V-0)  
 Standard Color:Black  
 Contact:Copper Alloy  
 Plating:Gold Plated  
 How To Order  
 PHDSM127-XXG-3522CR

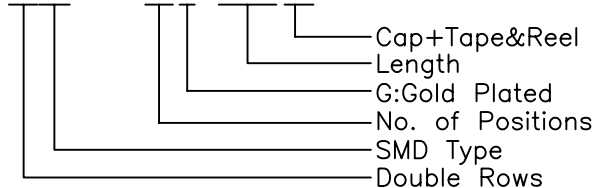

RoHS Compliant

F			
E			
D			
C			
B			
A	06-Jan-2020	(PC0001)	Ken
REV	DATE	FILE	BY

DRAWN:  
Ken  
 CHECKED:  
Lily Chou  
 APPROVAL:  
Chao Peng

GENERAL TOLERANCE:  
 .X=±0.20  
 .XX=±0.15  
 UNIT: MM  
 SCALE: 1:1  
 SHEET: 1 / 1  
 PROJECTION:

**HOYATO**  
Connector supplies  
 DESCRIPTION:  
1.27mm Pin Header SMT Type  
 PART NO:  
PHDSM127-XXG-3522CR

SIZE  
**A4**