




1

2

3

4

5

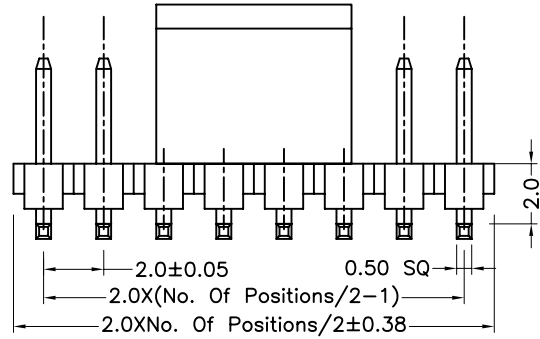
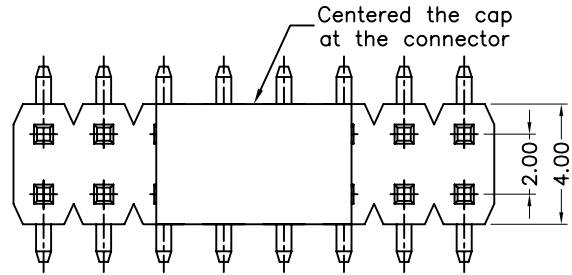


Specifications:

Current Rating:2.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:500V AC For One Minute
 Operating Temperature Rating:-40°C ~ +105°C
 Material and Finish
 Insulator:High Temp. Plastic (Nylon6T UL94V-0)
 Insulator Color:Ivory
 Contact:Copper Alloy
 Plated:Gold Plated

How To Order

PHDSM20-XXX-3525-CR

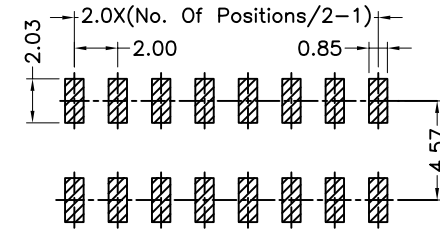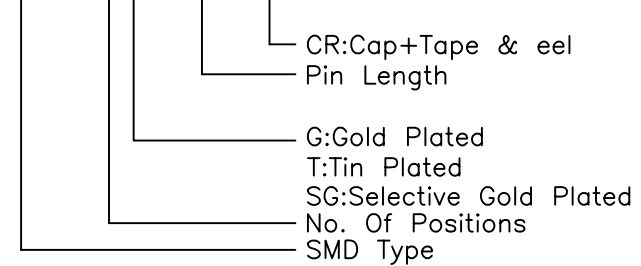

PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 2.0mm Pin Header SMD Type Double Rows	SIZE A4
E			Ken	.X = ±0.20 .XX = ±0.15				
D			CHECKED:	UNIT: MM				
C			Lily Chou	SCALE: 1:1				
B			APPROVAL:	SHEET: 1 / 1	PART NO:	PHDSM20-XXX-3525-CR		
A	05-Mar-2019	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					