
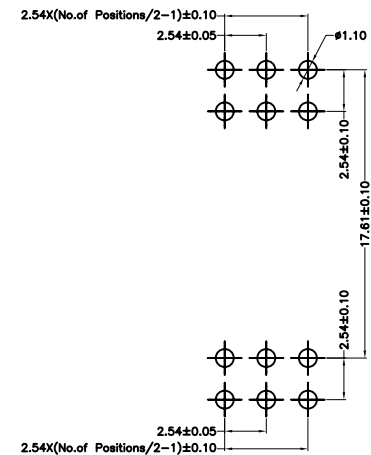
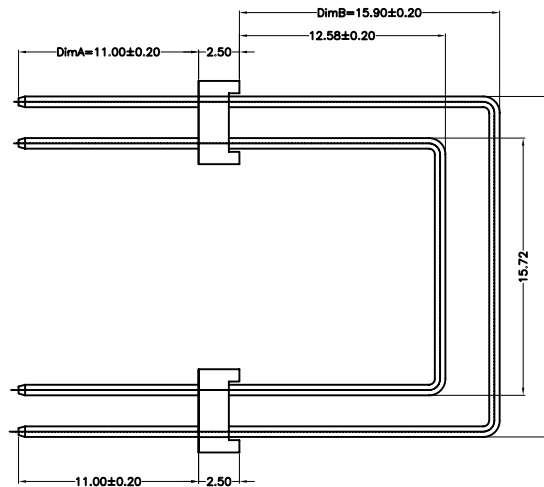
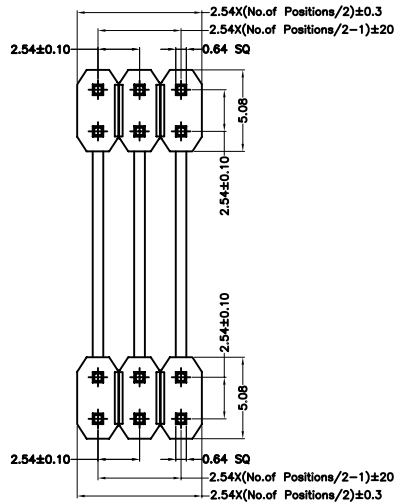


Specifications:

Current rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm Max
 Insulation Resistance:1000M ohm Min
 Withstanding Voltage:600V AC For one Minute
 Operating Temperature Range:-40°C To +105°C

Materials and Finish
 Insulator:PBT(UL94V-0)
 Insulator Color:Black
 Contact:Copper Alloy
 Plating:Gold Plated,Tin Plated

How To Order
 PHDUR254-XXX-111520

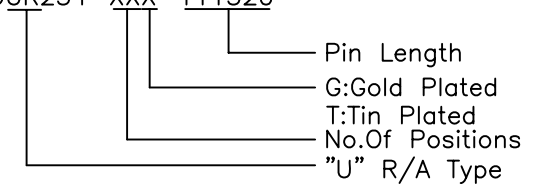

PCB Layout

RoHS Compliant

F			
E			
D			
C			
B			
A	01-SEP-2017	(PC0001)	Ken
REV	DATE	FILE	BY

DRAWN: Ken
 CHECKED: Lily Chou
 APPROVAL: Chao Peng

GENERAL TOLERANCE:
 .X=±0.20
 .XX=±0.15
 UNIT: MM
 SCALE: 1:1
 SHEET: 1 / 1
 PROJECTION:

DESCRIPTION: 2.54mm Pin Header
 Double Row R/A U Type
 PART NO: PHDUR254-XXX-111520

SIZE
A4

A
 B
 C
 D