



Specifications:

Current Rating:3.0A AC/DC  
 Voltage Rating:250V AC/DC  
 Contact Resistance:20m ohm. Max.  
 Insulation Resistance:1000M ohm. Min.  
 Withstanding Voltage:600V AC For One Minute  
 Operating Temperature Range:-40°C To +105°C

Material and Finish  
 Insulator:PBT (UL94V-0)  
 Insulator Color:Black

Contact:Copper Alloy  
 Plated:Gold Plated

How To Order  
 PHI254-XXG-2100A

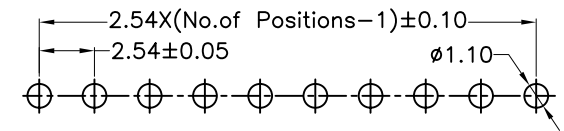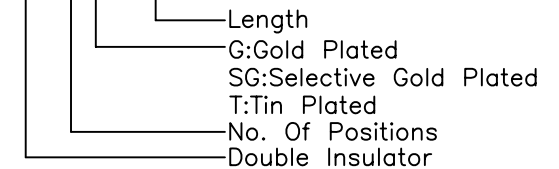

PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 2.54mm Pin Header Single Row Straight Type	SIZE <b>A4</b>
E			Ken	.X=±0.20 .XX=±0.15				
D			CHECKED:	UNIT: MM				
C			Lily Chou	SCALE: 1:1				
B			APPROVAL:	SHEET: 1 / 1	PART NO:	PHI254-XXX-2100A		
A	23-May-2018	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					