


Specifications:

Current Rating:2.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:500V AC For One Minute
 Operating Temperature Rating:-40°C ~ +105°C
 Material and Finish
 Insulator:PBT (UL94V-0)
 Insulator Color:Black
 Contact:Copper Alloy
 Plated:Gold Plated


How To Order

PHR20-XXG

G:Gold Plated
 No. Of Positions
 Right Angle

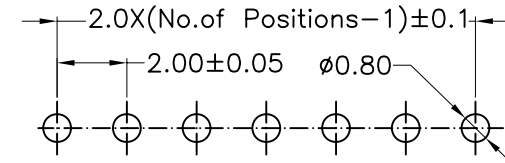

PCB Layout



RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION:	SIZE
E				Ken	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM	2.0mm Pin Header R/A Type	A4	
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 1	PART NO:	PHR20-XXG	
A	01-SEP-2009	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					