


Specifications:
 Current Rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm. Max.
 Insulation Resistance:1000M ohm. Min.
 Withstanding Voltage:600V AC For One Minute
 Operating Temperature Range:-40°C To +105°C
 Material and Finish
 Insulator:PBT (UL94V-0)
 Insulator Color:Black
 Contact:Copper Alloy
 Plating:Gold Plated,Tin Plated
 How To Order
 PHR254-XXX

G:Gold Plated
 T:Tin Plated
 No. Of Positions
 R:Right Angle

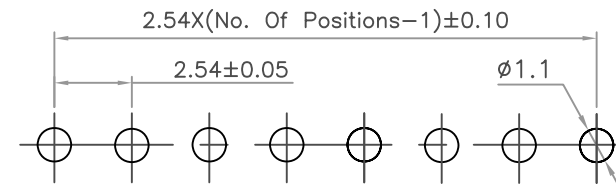

PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:			
E				Ken	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM	DESCRIPTION:	SIZE	
C				Lily Chou	SCALE: 1:1	2.54mm Pin Header Single Row Right Angle Type	A4	
B				APPROVAL:	SHEET: 1 / 1	PART NO:		
A	30-Apr-2015	(PC0001)	Ken	Chao Peng	PROJECTION:	PHR254-XXX		
REV	DATE	FILE	BY					