
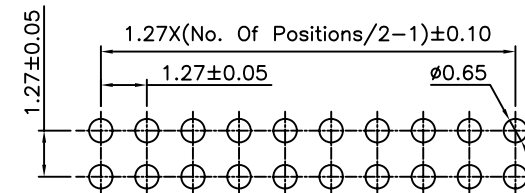


Specifications:
 Current Rating: 1.0 Amps
 Voltage Rating: 50V AC/DC
 Contact Resistance: 20mohm max.
 Insulation Resistance: 1,000M ohm min.
 Withstanding Voltage: 500V For One Minute
 Operating Temperature: -25°C ~ +105°C
 Material

Insulator: High Temp. Plastic (Nylon 6T UL94V-0)
 Standard Color: Black
 Contact: Copper Alloy
 Plating: Gold Plated
 How To Order
 PHRD127-XXG-302532

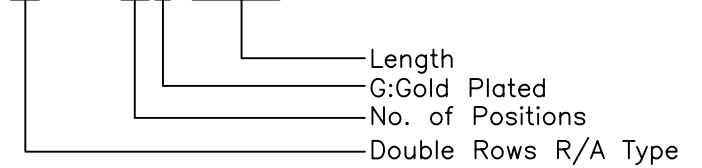

PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 1.27mm Pin Header R/A Type	SIZE A4
E			Ken	.X = ±0.20 .XX = ±0.15				
D			CHECKED:	UNIT: MM				
C			Lily Chou	SCALE: 1:1				
B			APPROVAL:	SHEET: 1 / 1	PART NO:	PHRD127-XXG-302532		
A	08-May-2014	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					