


Specifications:  
 Current rating:3A AC/DC  
 Voltage Rating:250V AC/DC  
 Contact Resistance:20m ohm Max  
 Insulation Resistance:1000M ohm Min  
 Withstanding Voltage:600V AC For one Minute  
 Operating Temperature Range:-40°C To +105°C  
 Materials:  
 Insulator:High Temp.Plastic(UL94V-0)  
 Contact:Copper Alloy  
 Plating:Gold Plated  
 How To Order  
 PHRSM254-XXX-6045

Length  
 G:Gold Plated  
 SG:Selective Gold Plated  
 T:Tin Plated  
 No. of Positions  
 SMT Type  
 R:Right Angle Type

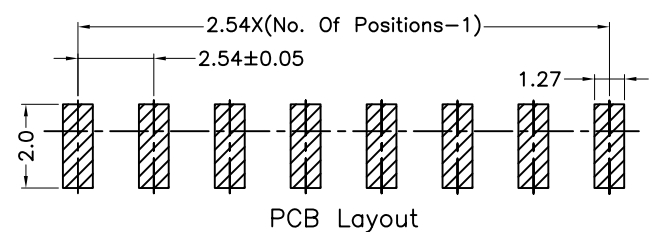

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 2.54mm Pin Header Single Row SMT Type	SIZE <b>A4</b>
E			Ken	.X=±0.20 .XX=±0.15				
D			CHECKED:	UNIT: MM				
C			Lily Chou	SCALE: 1:1				
B			APPROVAL:	SHEET: 1 / 1	PART NO:	PHRSM254-XXX-6045		
A	01-SEP-2009	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					