


Specifications:
 Current rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm Max
 Insulation Resistance:1000M ohm Min
 Withstanding Voltage:600V AC For one Minute
 Operating Temperature Range:-40°C To +105°C
 Materials and Finish
 Insulator:High Temp. Plastic(Nylon 6T UL94V-0)
 Insulator Color:Black
 Contact:Copper Alloy
 Plating:Gold Plated,Tin Plated
 How To Order
 PHSM254-XXX-BX

B1:B1 Type
 B2:B2 Type
 G:Gold Plated
 T:Tin Plated
 SG>Selectirve Gold Plated
 No.Of Positions
 SMT Type

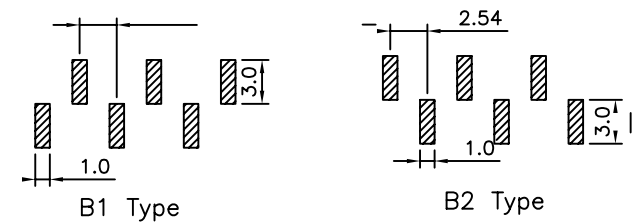

P.C.B Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 2.54mm Pin Header Straight SMT Type	SIZE A4
E			Ken	.X=±0.20 .XX=±0.15				
D			CHECKED:	UNIT: MM				
C			Lily Chou	SCALE: 1:1				
B			APPROVAL:	SHEET: 1 / 1	PART NO:	PHSM254-XXX-BX		
A	22-Oct-2019	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					