


Specifications:
 Current Rating:1.0 Amps
 Voltage Rating:50V AC/DC
 Contact Resistance:20mohm max.
 Insulation Resistance:1,000M ohm min.
 Withstanding Voltage:500V For One Minute
 Operating Temperature:-25°C ~ +105°C
 Material
 Insulator:High Temp.Plastic(Nylon 9T UL94V-0)
 Standard Color:Black
 Contact:Copper Alloy
 Plating:Gold Plated
 How To Order
 PHV127-XXX-630H10

Length
 G:Gold Plated
 T:Tin Plated
 SG>Selective Gold Plated
 No. of Positions
 Straight Type

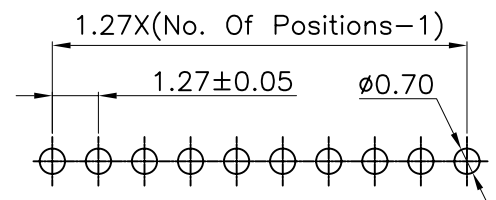

PCB Layout

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 1.27mm Pin Header Straight Type	SIZE A4
E								
D				CHECKED: Lily Chou	UNIT: MM	PART NO: PHV127-XXX-630H10		
C					SCALE: 1:1			
B	08-Mar-2022	Amend Plastic Dim	Ken	APPROVAL: Chao Peng	SHEET: 1 / 1			
A	08-May-2012	(PC0001)	Ken		PROJECTION:			
REV	DATE	FILE	BY					