


Specifications

Current Rating:3.0A AC/DC
 Voltage Rating:250V AC/DC
 Contact Resistance:20m ohm. Max.
 Insulation Resistance:1,000M ohm. Min.
 Withstanding Voltage:600V AC For One Minute
 Operating Temperature Range:-40°C To +105°C
 Material and Plated
 Insulator:High Temp. Plastic(PBT UL94V-0)
 Insulator Color:Black
 Contact:Copper Alloy
 Plated:Gold Plated
 How To Order
 PHV254-XXX-2108

Pin Length
 G:Gold Plated
 T:Tin Plated
 No. Of Positions
 V:Straight Type

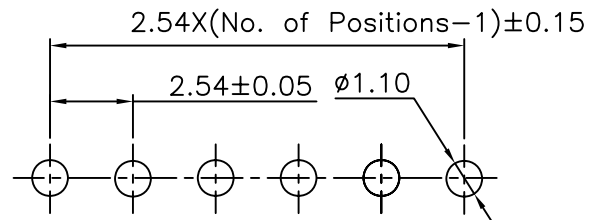

PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 2.54mm Pin Header Single Row Straight Type	SIZE A4
E			Ken	.X=±0.20 .XX=±0.15				
D			CHECKED:	UNIT: MM				
C			Lily Chou	SCALE: 1:1				
B			APPROVAL:	SHEET: 1 / 1	PART NO:	PHV254-XXX-2108		
A	13-May-2021	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					