

1

2

3

4






5

Specifications

Current Rating:3.0A AC/DC  
 Voltage Rating:250V AC/DC  
 Contact Resistance:20m ohm. Max.  
 Insulation Resistance:1,000M ohm. Min.  
 Withstanding Voltage:600V AC For One Minute  
 Operating Temperature Range:-40°C To +105°C  
 Material and Plated

Insulator:High Temp. Plastic(PBT UL94V-0)  
 Insulator Color:Black  
 Contact:Copper Alloy  
 Plated:Gold Plated

How To Order  
 PHV254-XXX-800

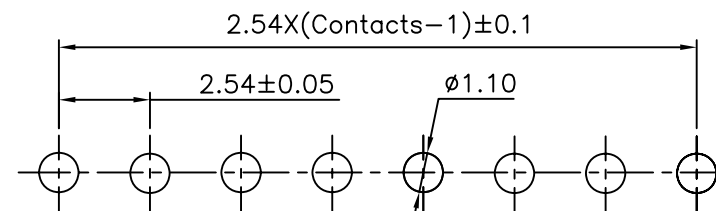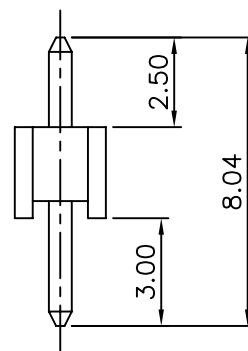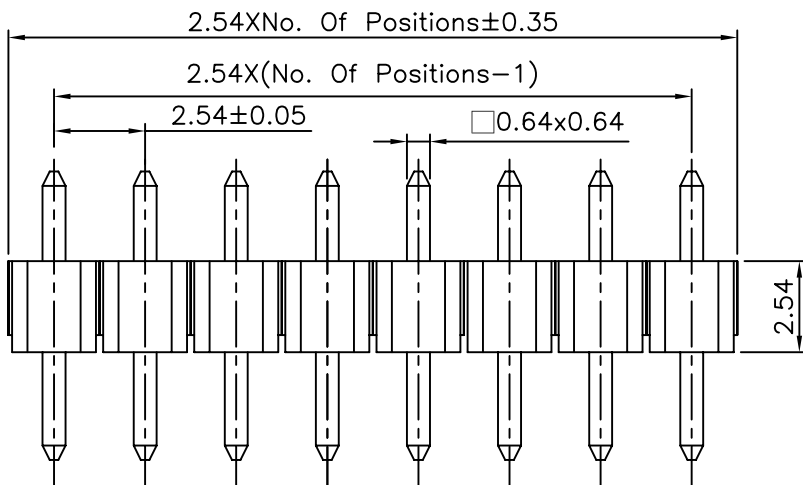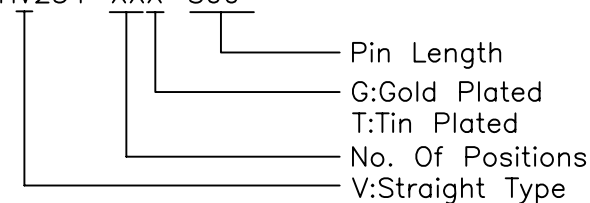

PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 2.54mm Pin Header Single Row Straight Type	SIZE
E				Ken	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM	PART NO:	A4	
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 1	PHV254-XXX-800		
A	27-SEP-2018	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					