


Dimension

Circuits	A	B	Circuits	A	B	Circuits	A	B	Circuits	A	B
04	4.40	2.00	24	24.40	22.00	44	44.40	42.00	64	64.40	62.00
06	6.40	4.00	26	26.40	24.00	46	46.40	44.00	66	66.40	64.00
08	8.40	6.00	28	28.40	26.00	48	48.40	46.00	68	68.40	66.00
10	10.40	8.00	30	30.40	28.00	50	50.40	48.00	70	70.40	68.00
12	12.40	10.00	32	32.40	30.00	52	52.40	50.00	72	72.40	70.00
14	14.40	12.00	34	34.40	32.00	54	54.40	52.00	74	74.40	72.00
16	16.40	14.00	36	36.40	34.00	56	56.40	54.00	76	76.40	74.00
18	18.40	16.00	38	38.40	36.00	58	58.40	56.00	78	78.40	76.00
20	20.40	18.00	40	40.40	38.00	60	60.40	58.00	80	80.40	78.00
22	22.40	20.00	42	42.40	40.00	62	62.40	60.00			

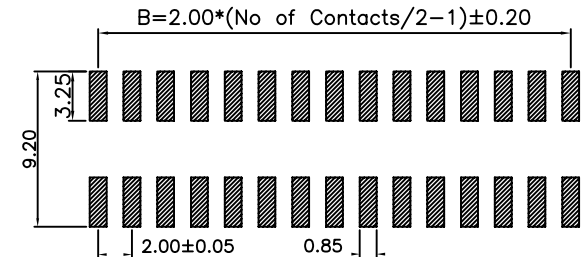


P.C.B Layout

RoHS Compliant

Specifications:

Current rating:2.0A AC/DC
 Voltage rating:250V AC/DC
 Contact resistance:20m ohm max.
 Withstanding Voltage:500V AC/minute
 Insulation resistance:1000M ohm min.
 Operating Temperature Rating:-40°C ~ +105°C
 Materials:
 Insulator:High Temp Plastic (LCP UL94V-0)
 Insulator Color:Black
 Contact:Phosphor Bronze
 Finish:Gold Plated



How To Order

PSD**B**RS**M**20-**XX**G
 — Gold Plated
 — No.of Positions
 — BRS**M**:Horizontal Entry SMT Type

F				DRAWN:	GENERAL TOLERANCE:			DESCRIPTION:	SIZE
E			Ken	.X=±0.20 .XX=±0.15	2.00mm PCB Socket Horizontal Entry SMT Type				
D			CHECKED:	UNIT: MM		PART NO: PSDBRSM20-XXG			
C			Lily Chou	SCALE: 1:1					
B			APPROVAL:	SHEET: 1 / 1					
A	10-Nov-2014	(PC0001)	Ken	PROJECTION:					
REV	DATE	FILE	BY	Chao Peng					