


Specifications:
 Current rating:1.0A AC/DC
 Voltage rating:50V AC/DC
 Contact resistance:20m ohm max.
 Insulation Resistance:1000M ohm min.
 Withstanding voltage:500V AC/minute
 Operating Temperature range:-25°C to +105°C
 Material:
 Insulator:High Temp.Plastic(Nylon 9T UL94V-0)
 Insulator Color:Black
 Contact:Copper Alloy
 Plated:Gold Plated
 How To Order
 PSDSM127-XXG-45-PCR
 Plastic Cap+Tape & Reel
 Total Height:4.5mm
 G:Gold Plated
 No. Of Contacts
 Double Rows SMT Type

Dimension:

Pin No.	Dim A	Dim B	Pin No.	Dim A	Dim B	Pin No.	Dim A	Dim B	Pin No.	Dim A	Dim B
04	1.27	3.24	24	13.97	15.94	44	26.67	28.64	64	39.37	41.34
06	2.54	4.51	26	15.24	17.21	46	27.94	29.91	66	40.64	42.61
08	3.81	5.78	28	16.51	18.48	48	29.21	31.18	68	41.91	43.88
10	5.08	7.05	30	17.78	19.75	50	30.48	32.45	70	43.18	45.15
12	6.35	8.32	32	19.05	21.02	52	31.75	33.72	72	44.45	46.42
14	7.62	9.59	34	20.32	22.29	54	33.02	34.99	74	45.72	47.69
16	8.89	10.86	36	21.59	23.56	56	34.29	36.26	76	46.99	48.96
18	10.16	12.13	38	22.86	24.83	58	35.56	37.53	78	48.26	50.23
20	11.43	13.40	40	24.13	26.10	60	36.83	38.80	80	49.53	51.50
22	12.70	14.67	42	25.40	27.37	62	38.10	40.07			

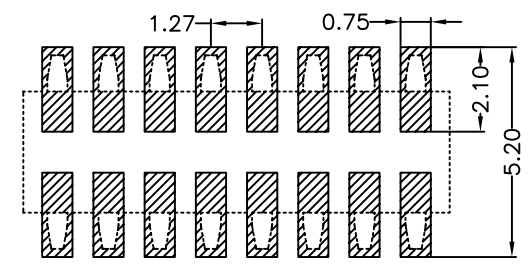

P.C.B LAYOUT RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 1.27mm PCB Socket 4.5mm Height SMT Type	SIZE A4
E			Ken	.X=±0.20 .XX=±0.15				
D			CHECKED:	UNIT: MM				
C			Lily Chou	SCALE: 1:1				
B	05-Aug-2019	Amend Nylon 9T	Ken	APPROVAL:	SHEET: 1 / 1	PART NO:	PSDSM127-XXG-45-PCR	
A	01-SEP-2012	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					