



Specifications:

Current Rating: 3.0A AC/DC
 Voltage Rating: 250V AC/DC
 Contact Resistance: 20m ohm. max.
 Insulation Resistance: 1,000M ohm. min.
 Withstanding Voltage: 600V AC/minute
 Operating Temperature Range: -40°C to +105°C
 Material and Finish
 Insulator: High Temp. Plastic (Nylon 9T UL94V-0)
 Insulator Color:Black
 Contact: Phosphor Bronze
 Plating: Gold Plated
 How To Order
 PSDSM254-XXG-75

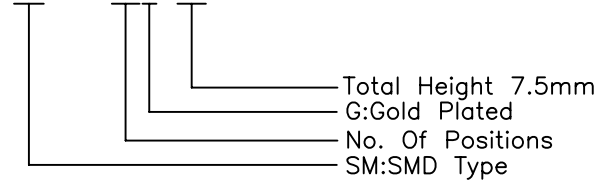

Dimension :

Poles	DIM:(mm)		Poles	DIM:(mm)	
	A	B		A	B
4	5.58	2.54	24	30.98	27.94
6	8.12	5.08	26	33.52	30.48
8	10.66	7.62	28	36.06	33.02
10	13.20	10.16	30	38.60	35.56
12	15.74	12.70	32	41.14	38.10
14	18.28	15.24	34	43.68	40.64
16	20.82	17.78	36	46.22	43.18
18	23.36	20.32	38	48.76	45.72
20	25.90	22.86	40	51.30	48.26
22	28.44	25.40			

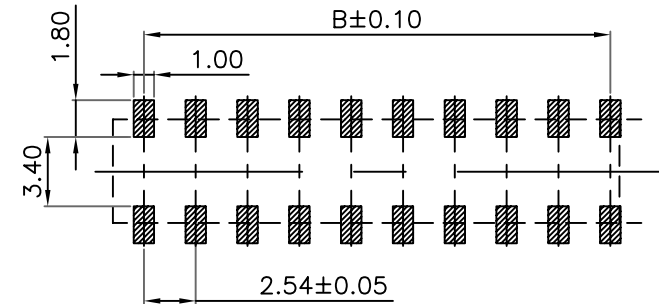

P.C.B. Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 2.54mm PCB Socket 7.5mm Height SMT Type	SIZE A4
E				Ken	.X=±0.20 .XX=±0.15			
D				CHECKED:	UNIT: MM			
C				Lily Chou	SCALE: 1:1			
B				APPROVAL:	SHEET: 1 / 1	PART NO:	PSDSM254-XXG-75	
A	01-SEP-2009	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					