


Specifications:

Current Rating: 2.0A AC/DC  
 Voltage Rating: 250V AC/DC  
 Contact Resistance: 20m ohm max.  
 Withstanding Voltage: 500V AC/minute  
 Insulation Resistance: 1000M ohm min.  
 Operating Temperature Rating: -40°C ~ +105°C  
 Materials:

Insulator: High Temp. Plastic (Nylon 6T UL94V-0)  
 Insulator Color: Black  
 Contact: Brass  
 Finish: Gold Plated


How To Order

PSH20-XXG-1855

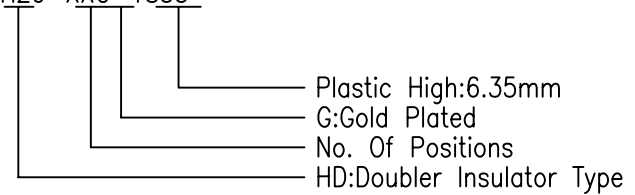

Dimension:

No. of Contacts	Dimension:		No. of Contacts	Dimension:		No. of Contacts	Dimension:		No. of Contacts	Dimension:	
	A	B		A	B		A	B		A	B
04	2.00	4.30	20	18.00	20.30	36	34.00	36.30	52	50.00	52.30
06	4.00	6.30	22	20.00	22.30	38	36.00	38.30	54	52.00	54.30
08	6.00	8.30	24	22.00	24.30	40	38.00	40.30	56	54.00	56.30
10	8.00	10.30	26	24.00	26.30	42	40.00	42.30	58	56.00	58.30
12	10.00	12.30	28	26.00	28.30	44	42.00	44.30	60	58.00	60.30
14	12.00	14.30	30	28.00	30.30	46	44.00	46.30			
16	14.00	16.30	32	30.00	32.30	48	46.00	48.30			
18	16.00	18.30	34	32.00	34.30	50	48.00	50.30			

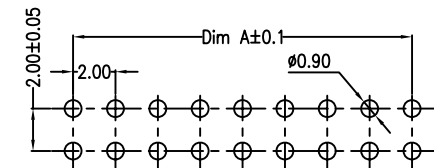

PCB Layout

RoHS Compliant

F				DRAWN: Ken	GENERAL TOLERANCE: .X=±0.20 .XX=±0.15		DESCRIPTION: 2.0m PCB Socket Single Row Single Insulator Type	SIZE
E								
D				CHECKED: Lily Chou	UNIT: MM	PART NO: PSH20-XXG-1855	A4	
C					SCALE: 1:1			
B				APPROVAL: Chao Peng	SHEET: 1 / 1			
A	15-Feb-2017	(PC0001)	Ken		PROJECTION:			
REV	DATE	FILE	BY					