




Specifications:  
 Current rating: 1.0A AC/DC  
 Voltage rating: 50V AC/DC  
 Contact resistance: 20m ohm max.  
 Insulation Resistance: 1000M ohm min.  
 Withstanding voltage: 500V AC/minute  
 Operating Temperature range: -25°C to +105°C  
 Material:  
 Insulator: High Temp. Plastic (UL94V-0)  
 Insulator Color: Black  
 Contact: Phosphor Bronze  
 Plated: Gold Plated

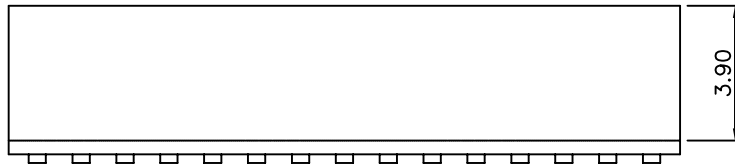

How To Order  
 PSR127-XXG  
 G: Gold Plated  
 No. Of Contacts  
 R/A Dip Type

Dimension :

Pin No.	Dim A	Dim B	Pin No.	Dim A	Dim B	Pin No.	Dim A	Dim B	Pin No.	Dim A	Dim B
2	1.27	2.92	12	13.97	15.62	22	26.67	28.32	32	39.37	41.02
3	2.54	4.19	13	15.24	16.89	23	27.94	29.59	33	40.64	42.29
4	3.81	5.46	14	16.51	18.16	24	29.21	30.86	34	41.91	43.56
5	5.08	6.73	15	17.78	19.43	25	30.48	32.13	35	43.18	44.83
6	6.35	8.00	16	19.05	20.70	26	31.75	33.40	36	44.45	46.10
7	7.62	9.27	17	20.32	21.97	27	33.02	34.67	37	45.72	47.37
8	8.89	10.54	18	21.59	23.24	28	34.29	35.94	38	46.99	48.64
9	10.16	11.81	19	22.86	24.51	29	35.56	37.21	39	48.26	49.91
10	11.43	13.08	20	24.13	25.78	30	36.83	38.48	40	49.53	51.18
11	12.70	14.35	21	25.40	27.05	31	38.10	39.75			

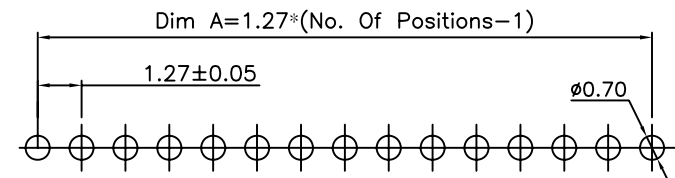

PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 1.27mm PCB Socket 2.2mm Height SMT Type	SIZE <b>A4</b>
E			Ken	.X = ±0.20 .XX = ±0.15				
D			CHECKED:	UNIT: MM				
C			Lily Chou	SCALE: 1:1				
B			APPROVAL:	SHEET: 1 / 1	PART NO:	PSR127-XXG		
A	15-SEP-2014	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					