



B1 Type

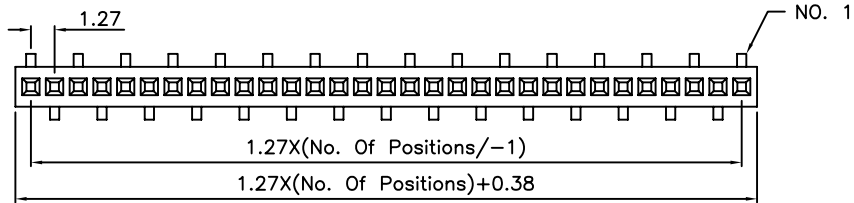

B2 Type



Specifications:

Current rating:1.0A AC/DC  
 Voltage rating:50V AC/DC  
 Contact resistance:20m ohm max.  
 Insulation Resistance:1000M ohm min.  
 Withstanding voltage:500V AC/minute  
 Operating Temperature range:-25°C to +105°C  
 Material:

Insulator:High Temp.Plastic(LCP UL94V-0)  
 Insulator Color:Black  
 Contact:Phosphor Bronze  
 Plated:Gold Plated


How To Order

PSSM127-XXG-23-BX


B1:B1 Type  
 Total Height:2.2mm  
 G:Gold Plated  
 No. Of Contacts  
 SMT Type

Dimension :

Pin No.	Dim A	Dim B	Pin No.	Dim A	Dim B	Pin No.	Dim A	Dim B	Pin No.	Dim A	Dim B
2	1.27	2.92	12	13.97	15.62	22	26.67	28.32	32	39.37	41.02
3	2.54	4.19	13	15.24	16.89	23	27.94	29.59	33	40.64	42.29
4	3.81	5.46	14	16.51	18.16	24	29.21	30.86	34	41.91	43.56
5	5.08	6.73	15	17.78	19.43	25	30.48	32.13	35	43.18	44.83
6	6.35	8.00	16	19.05	20.70	26	31.75	33.40	36	44.45	46.10
7	7.62	9.27	17	20.32	21.97	27	33.02	34.67	37	45.72	47.37
8	8.89	10.54	18	21.59	23.24	28	34.29	35.94	38	46.99	48.64
9	10.16	11.81	19	22.86	24.51	29	35.56	37.21	39	48.26	49.91
10	11.43	13.08	20	24.13	25.78	30	36.83	38.48	40	49.53	51.18
11	12.70	14.35	21	25.40	27.05	31	38.10	39.75			

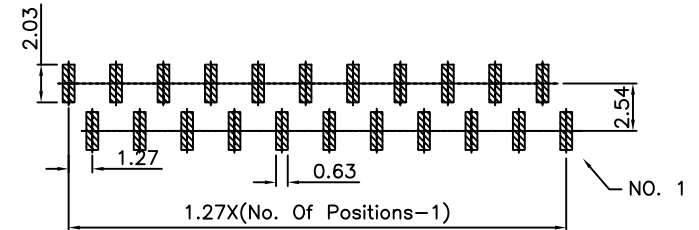

B1 Type PCB Layout

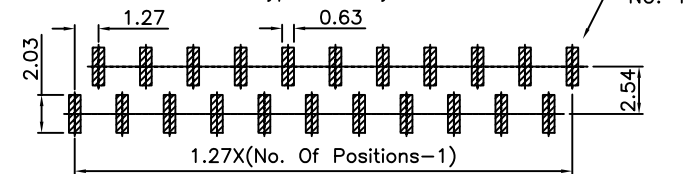

B2 Type PCB Layout

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 1.27mm PCB Socket 2.2mm Height SMT Type	SIZE <b>A4</b>
E			Ken	.X=±0.20 .XX=±0.15				
D			CHECKED:	UNIT: MM				
C			Lily Chou	SCALE: 1:1				
B			APPROVAL:	SHEET: 1 / 1	PART NO:	PSSM127-XXG-22-BX		
A	15-SEP-2014	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					