



B2 Type




Dimension :

Poles	DIM:(mm)		Poles	DIM:(mm)	
	A	B		A	B
6	7.62	5.08	26	33.02	30.48
8	10.16	7.62	28	35.56	33.02
10	12.70	10.16	30	38.10	35.56
12	15.24	12.70	32	40.64	38.10
14	17.78	15.24	34	43.18	40.64
16	20.32	17.78	36	45.72	43.18
18	22.86	20.32	38	48.26	45.72
20	25.40	22.86	40	50.80	48.26
22	27.94	25.40			
24	30.48	27.94			

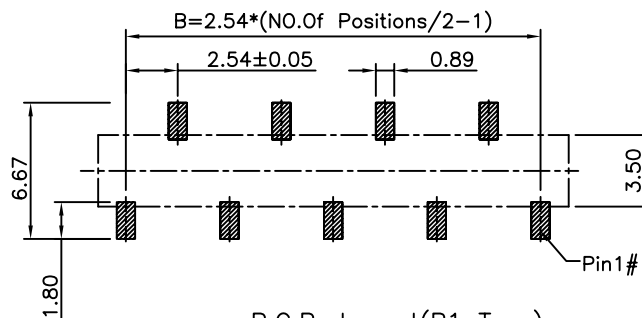

P.C.B. Layout(B1 Type)

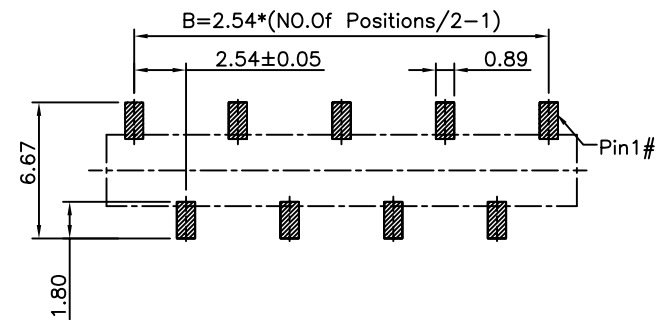

P.C.B. Layout(B2 Type)

Specifications:

Current Rating: 3.0A AC/DC
 Voltage Rating: 250V AC/DC
 Contact Resistance: 20m ohm. max.
 Insulation Resistance: 1,000M ohm. min.
 Withstanding Voltage: 600V AC/minute
 Operating Temperature Range: -40°C to +105°C
 Material and Finish
 Insulator: High Temp. Plastic (Nylon 6T UL94V-0)
 Insulator Color:Black
 Contact: Phosphor Bronze
 Plating: Gold Plated
 How To Order
 PSSM254-XXG-37-BX-PCR

Tape & Reel
 B1:B1 Type B2:B2 Type
 Total Height 3.7mm
 G:Gold Plated
 No. Of Positions
 SM:SMD Type

RoHS Compliant

F			
E			
D			
C			
B			
A	07-Nov-2018	(PC0001)	Ken
REV	DATE	FILE	BY

DRAWN:	Ken
CHECKED:	Lily Chou
APPROVAL:	Chao Peng

GENERAL TOLERANCE:	.X=±0.20 .XX=±0.15
UNIT:	MM
SCALE:	1:1
SHEET:	1 / 1
PROJECTION:	

DESCRIPTION:	2.54mm PCB Socket 3.7mm Height SMT Type
PART NO:	PSSM254-XXG-37-BX-PCR

SIZE	A4
------	----