




1

2

3

4

5

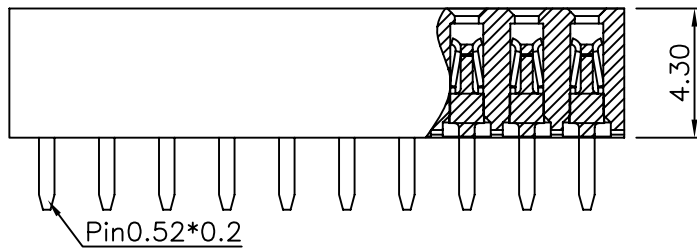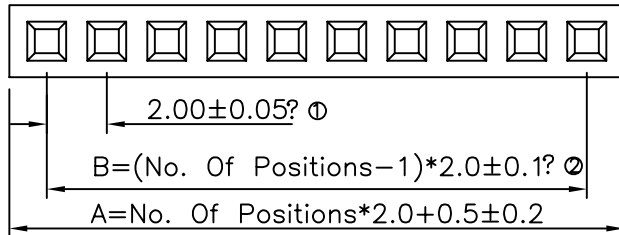

Specifications:

Current Rating: 2.0A AC/DC

Voltage Rating: 250V AC/DC

Contact Resistance: 20m ohm max.

Withstanding Voltage: 500V AC/minute

Insulation Resistance: 1000M ohm min.

Operating Temperature Rating: -40°C ~ +105°C

Materials:

Insulator: High Temp. Plastic (UL94V-0)

Insulator Color: Black


Contact: Phosphor Bronze

Finish: Gold Plated

How To Order


PSV20-XXG

G: Gold Plated
 No. Of Positions
 V: Straight Type



Dimension :

Pos	Dim A	Dim B	Pos	Dim A	Dim B	Pos	Dim A	Dim B
2	4.50	2.00	10	20.50	18.00	23	46.50	44.00
3	6.50	4.00	11	22.50	20.00	25	50.50	48.00
4	8.50	6.00	12	24.50	22.00	28	56.50	54.00
5	10.50	8.00	13	26.50	24.00	30	60.50	58.00
6	12.50	10.00	14	28.50	26.00	33	66.50	64.00
7	14.50	12.00	15	30.50	28.00	35	70.50	68.00
8	16.50	14.00	18	36.50	34.00	38	76.50	74.00
9	18.50	16.00	20	40.50	38.00	40	80.50	78.00

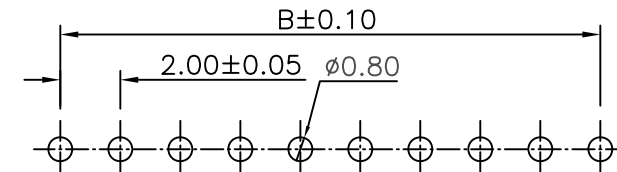

PCB Layout

RoHS Compliant

F			
E			
D			
C			
B			
A	01-SEP-2009	(PC0001)	Ken
REV	DATE	FILE	BY

DRAWN:
Ken

CHECKED:
Lily Chou

APPROVAL:
Chao Peng

GENERAL TOLERANCE:

.X = ±0.20

.XX = ±0.15

UNIT: MM

SCALE: 1:1

SHEET: 1 / 1

PROJECTION:



DESCRIPTION:

2.0m PCB Socket Straight Type

PART NO:

PSV20-XXG

SIZE

A4