


1

2

3

4

5

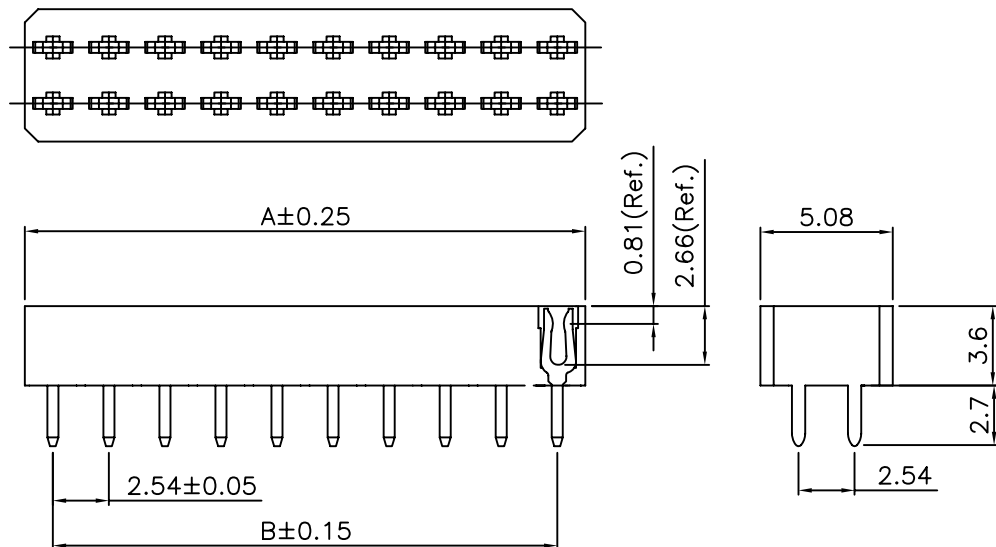


Dimension :

Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)		Poles	DIM:(mm)	
	A	B		A	B		A	B		A	B
4	5.08	2.54	24	30.48	27.94	44	55.88	53.34	64	81.28	78.74
6	7.62	5.08	26	33.02	30.48	46	58.42	55.88	66	83.82	81.28
8	10.16	7.62	28	35.56	33.02	48	60.96	58.42	68	86.36	83.82
10	12.70	10.16	30	38.10	35.56	50	63.50	60.96	70	88.90	86.36
12	15.24	12.70	32	40.64	38.10	52	66.04	63.50	72	91.44	88.90
14	17.78	15.24	34	43.18	40.64	54	68.58	66.04	74	93.98	91.44
16	20.32	17.78	36	45.72	43.18	56	71.12	68.58	76	96.52	93.98
18	22.86	20.32	38	48.26	45.72	58	73.66	71.12	78	99.06	96.52
20	25.40	22.86	40	50.80	48.26	60	76.20	73.66	80	101.6	99.06
22	27.94	25.40	42	53.34	50.80	62	78.74	76.20			

Specifications:

Current rating: 3.0A AC, DC
 Voltage rating: 250V AC, DC
 Contact resistance: 20m ohm max.
 Insulation resistance: 1,000M ohm min.
 Withstanding voltage: 600V AC/minute
 Operating temperature range: -40°C to +105°C
 Material:

Insulator: High Temp. Plastic (Nylon 46 UL94V-0)
 Standard Color:Black
 Contact: Copper Alloy
 Finish:Gold Plated
 How To Order
 PSVD254-XXG-36

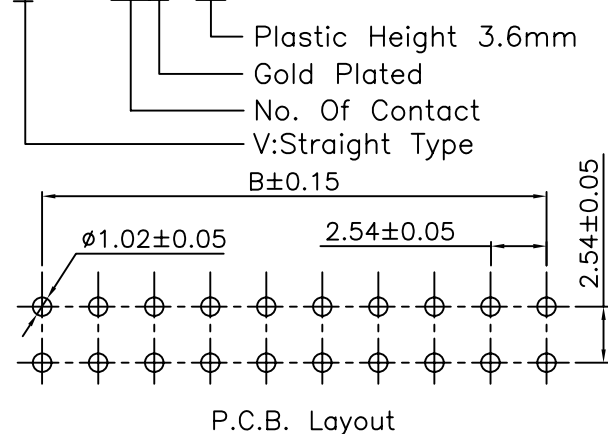

RoHS Compliant

F				DRAWN:	GENERAL TOLERANCE:		DESCRIPTION: 2.54mm PCB Socket Double Row Straight Type	SIZE A4
E				Ken	.X = ±0.20 .XX = ±0.15			
D				CHECKED:	UNIT: MM	PART NO: PSVD254-XXG-36		
C				Lily Chou	SCALE: 1:1			
B	08-Aug-2018	Amend Dip 2.7mm	Ken	APPROVAL:	SHEET: 1 / 1			
A	01-SEP-2009	(PC0001)	Ken	Chao Peng	PROJECTION:			
REV	DATE	FILE	BY					